

Specifications

MODELS	GS™-2668 RTO		GS™-3268 RTO	
MEASUREMENTS	Metric	US	Metric	US
Working height maximum	9.70 m	32 ft	11.51 m	38 ft
A Platform height maximum	7.9 m	26 ft	9.70 m	32 ft
B Platform length - outside	2.5 m	8 ft 3 in	2.5 m	8 ft 3 in
- extended	3.96 m	156 in	3.96 m	156 in
Roll-out platform extension deck	1.52 m	60 in	1.52 m	60 in
C Platform width - outside	1.55 m	61 in	1.55 m	61 in
Toeboard height	15 cm	6 in	15 cm	6 in
Platform height - stowed	1.19 m	46.75 in	1.31 m	51.75 in
D Height - stowed**	2.32 m	9.5 in	2.45 m	96.5 in
rails lowered	1.7 m	67 in	1.83 m	72 in
E Length - stowed	2.51 m	99 in	2.51 m	99 in
platform extended	4.08 m	13 ft 5.5 in	4.08 m	13 ft 5.5 in
with outriggers	3.26 m	10 ft 9 in	3.26 m	10 ft 9 in
F Width	1.73 m	68 in	1.73 m	68 in
G Wheelbase	1.85 m	73 in	1.85 m	73 in
H Ground clearance - centre	19 cm	7.5 in	19 cm	7.5 in

PRODUCTIVITY

Lift capacity	567 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	5.6 km/h	3.3 mph	5.6 km/h	3.3 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability	30%	30%	25%	25%
Maximum outrigger leveling:				
front to back	6.6%	6.6%	6.6%	6.6%
side to side	10.6%	10.6%	10.6%	10.6%
Turning radius - inside	1.52 m	60 in	1.52 m	60 in
Turning radius - outside	3.68 m	145 in	3.68 m	145 in
Raise/lower speed	30/35 sec	30/35 sec	50/37 sec	50/37 sec
Controls	proportional	proportional	proportional	proportional
Drive	dual front wheel	dual front wheel	dual front wheel	dual front wheel
Tyres	30 x 60 cm	12 x 23.5 in	30 x 60 cm	12 x 23.5 in
Tyre contact pressure	594 kPa	86 psi	567 kPa	82 psi

POWER




Power source	Kubota Diesel 20 hp (15 kW)		Kubota Diesel 20 hp (15 kW)	
Auxiliary power unit	12 V DC	12 V DC	12 V DC	12 V DC
Fuel tank capacity	56.8 L	15 gal	56.8 L	15 gal
Hydraulic system capacity	62.4 L	16.5 gal	62.42 L	16.5 gal

WEIGHT

	3,415 kg	7,528 lbs	4,153 kg	9,155 lbs
--	----------	-----------	----------	-----------

STANDARDS COMPLIANCE

	ANSI/SIA A92.6 CSA CAN3-B354.2-M82 CE compliance option AS 1418.10
--	---

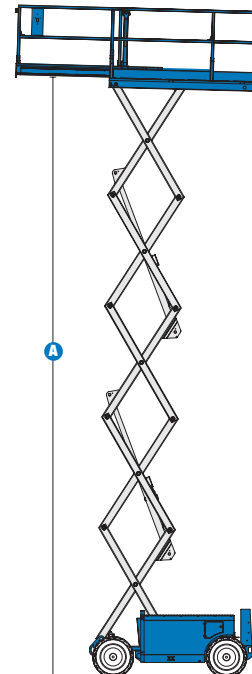



SELF-PROPELLED SCISSOR LIFTS

GS™ -2668 RTO & GS™ -3268 RTO

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2668RT

- 9.70 m (32 ft) working height
- Up to 568 kg (1,250 lbs) lift capacity

GS™-3268RT

- 11.51 m (38 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

PRODUCTIVITY

- 1.52 m (60 in) roll-out platform extension
- 1.73 m (68 in) unit width
- 454 kg (1,000 lb) load capacity for the GS-3268 and 567 kg (1,250 lb) load capacity for the GS-2668
- Proportional drive
- Multiple disc brakes
- Emergency stop switches at platform and ground controls
- Manual brake release
- Full height platform swing gate
- Swing-out battery tray
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Automotive-style horn
- Hour meter
- Dual flashing lights

POWER

- Kubota Diesel 20 hp/15 kW



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Motion alarm
- Air line to platform
- Platform work lights
- Turf tyres
- Hydraulic oil cooler

Genie Australia

591 Boundary Road, Darra, Qld 4076
PO Box 394, Richlands, Qld 4077
Tel: + 61 7 3375 1660
Toll Free In Australia: 1800 331 660
Fax: + 61 7 3375 1002

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain

Gai`a 31, Pol. Ind. Pl`a d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com.au

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEREX Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2006 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a TEREX Company.

06/06. Part No. B108016AUS

www.genieindustries.com.au

