




## SOLAR LIGHTING TOWER

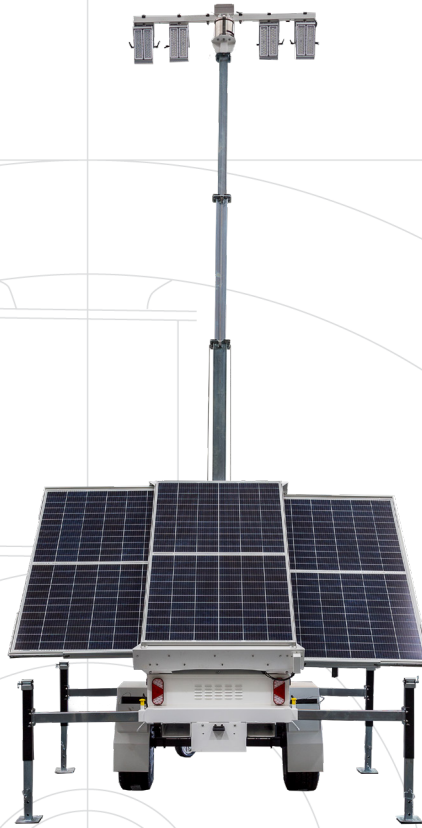

## METRO GP43K

### GENERAL

Model	Metro - GP43k
Lumen Output	43,000
Mast Height	7.5 Metres
Mast Type	Electric/Cable
Lights	4 x 100w LED Modules
Coverage	130 x 120m at 3 lux
Light Bar Rotation	355°
Light Bar Tilt	70°
Trailer Type	Single Axle
Tyre and Rim Size	14'
Stabiliser Supports	4 x Manual
Mudguard / Wheel Chock	Included
Security Features	Wheel lock / hitch lock, wheel clamp, folding drawbar Timer, day/night modes, jack pads, audio safety messages fire extinguisher, isolators, tilt sensor

### OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0° to 50° (-25° with optional kit)

### BATTERY

Battery	10.24kWh Lithium
Runtime	48 Hours
Solar	1.34kWp
Solar Tilt	45°
Efficiency (solar)	1 hour of sun/4 hours of light

### UNIT

Dimensions (Towing)	3350x 1470 x 2985 (LxWxH)
Dimensions (Deployed)	2260x 3360 x 7970 (LxWxH)
Dimensions (Stowed)	2260 x 1470 x 2985 (LxWxH)
Weight	1220kg

