


# THE READY TO GO RANGE

The 8 Series. What do you tow?

*Sustainable Productivity*

*Atlas Copco*

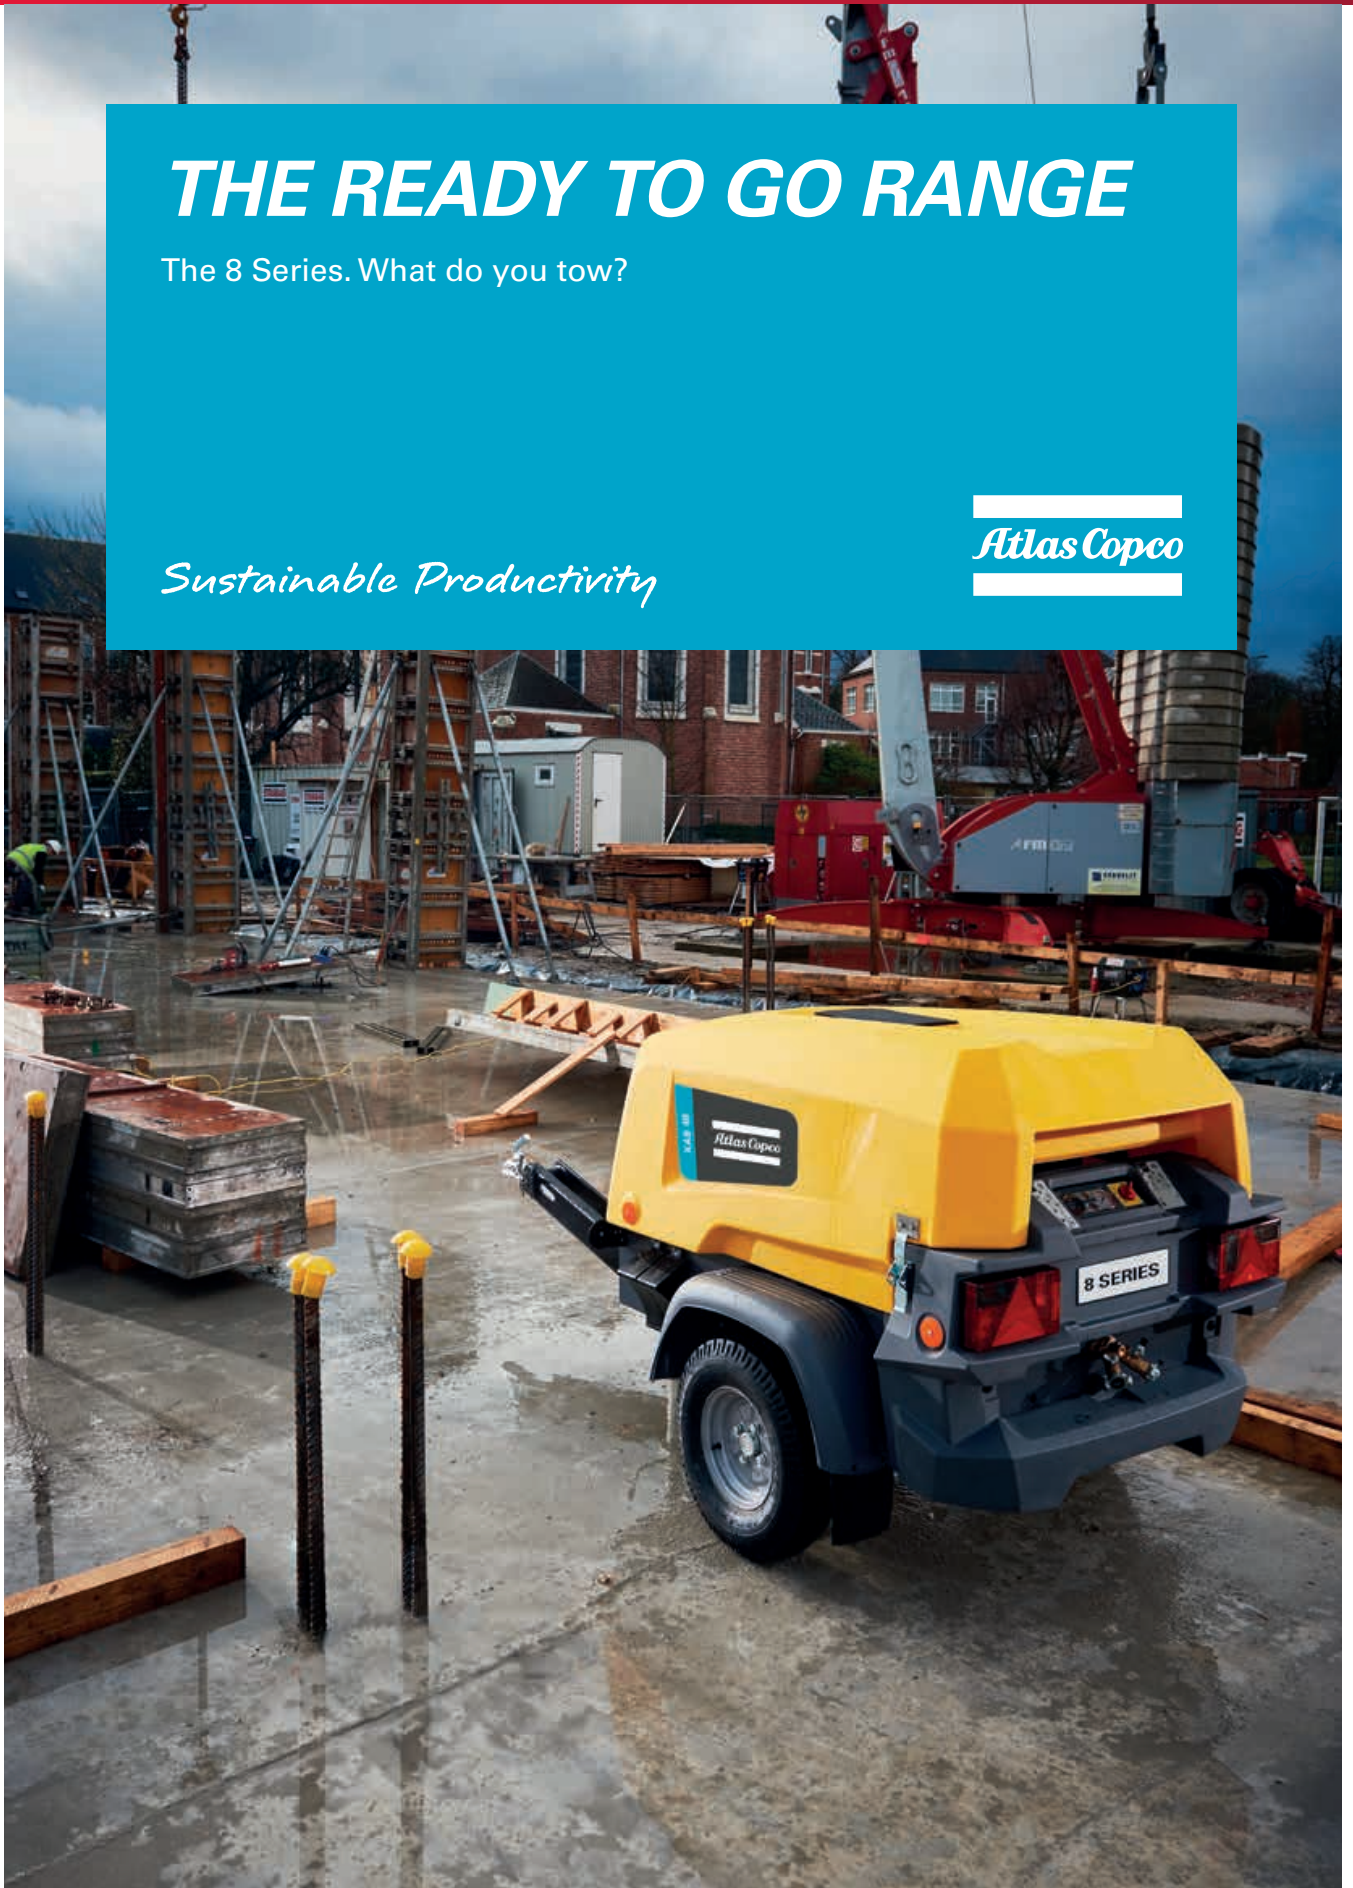

## Introducing the 8 Series

The 8 Series compressor range is the result of over a decade of continuous development. For the first time, it's possible to transport behind a normal passenger car, with no special driving license, a compressor that can produce up to 5 m<sup>3</sup>/min of air, with a full size fuel tank, aftercooler and generator all incorporated into a compact and lightweight package.

This is all made possible by the latest development in our pioneering air element design, we can produce a compressor up to 150 kg lighter than comparable models. However, we understand that this means nothing without efficiency. Efficiency can mean many things, such as reduced service time, fuel consumption or increased utilization. The 8 Series ticks all the boxes when it comes to delivering outstanding performance in all of these categories.

Lastly, depending on your application you might ask about robustness, durability, ruggedness or toughness – we have one simple word for all of the above – The HardHat®. This legendary canopy was born in 2005 and the 8 Series features the latest, toughest design.

The amazing 8 Series, it's all about the numbers, it's all about changing the game and we have one clear challenge to you – **what do you tow?**

## Better together

One small 8 Series compressor can power two RTEX breakers.



reddot design award  
winner 2017

**Atlas Copco**



## 8 standard features



[www.atlascopco.com](http://www.atlascopco.com)



## TECHNICAL DATA

Performance		XAS 38 Kd	XAS 48 Kd	XAHS 38 Kd	XAS 58 Kd	XAS 68 Kd
Working pressure	bar (g)	7	7	12	7	7
	psi (g)	100	100	175	100	100
Max. free air delivery	m <sup>3</sup> /min	2	2,5	2,2	3	3,5
	cfm	70	90 (108*)	80	106	125
Output power	kVA	-	-	-	-	-
Max. ambient temperature at sea level	°C	50	50	50	50	50
Min. starting temperature / (cold start Aid)	°C	-10 / -20	-10 / -20	-10 / -20	-10 / -20	-10 / -20
Engine						
Model		KUBOTA D 722	KUBOTA D 902	KUBOTA V 1505	KUBOTA V 1505	KUBOTA V 1505
Number of cylinders		3	3	4	4	4
Power output @ normal shaft speed	kW	14,9	18,5	26,5	26,5	26,5
Nominal speed	rpm	3400	3600 (3400*)	3000	3000	3000
Unload speed	rpm	2000	2000	1850	1850	1850
Capacity						
Engine oil	l	3,6	3,6	5,5	5,5	5,5
Compressor oil	l	5,5	5,5	7,7	7,7	7,7
Fuel tank capacity	l	27	27	60	60	60
Noise level						
Sound power level (LwA)	dB(A)	98	98	98	98	98
Sound pressure level (LpA) at 7m	dB(A)	70	70	70	70	70
Dimensions and weight (box unit / undercarriage)						
Length	mm	1570 / 1960	1570 / 1960	1940 / 2290	1940 / 2290	1940 / 2290
Width	mm	1060 / 1230	1060 / 1230	1180 / 1350	1180 / 1350	1180 / 1350
Height	mm	990 / 1250	990 / 1250	1150 / 1400	1150 / 1400	1150 / 1400
Weight (box / portable)	kg	440 / 500	440 / 500	650 / <750	650 / <750	650 / <750

\*Values in brackets for non-European models

## AVAILABLE OPTIONS INCLUDE:

- Adjustable towbar with brakes
- Adjustable towbar without brakes
- Fixed towbar with brakes
- Fixed towbar without brakes
- DoT approved undercarriage
- Support mounted
- Support leg
- Jockey wheel
- Road signalization + wheel chocks
- Towing eye (DIN, NATO, AC, BNA, ITA, GB, Ball coupling)
- Loose ball coupling
- Special colours
- Cold start
- Toolbox
- Aftercooler + water separator
- Aftercooler + water separator + reheater
- Aftercooler by-pass
- Additional fuel filter
- Safety cartridge
- Lubricator
- Non-return valve
- Tilt protection
- Hose reel
- DPF
- LED lights
- Refinery equipment



Atlas Copco

Performance		XATS 68 Kd	XAS 78 Kd	XAS 88 Kd	XAS 48 KdG	XAS 68 KdG
Working pressure	bar (g)	10	7	7	7	7
	psi (g)	150	100	100	100	100
Max. free air delivery	m <sup>3</sup> /min	3,5	4,5	5	2,5	3,5
	cfm	125	160	175	90	125
Output power	kVA	-	-	-	6,5   12	6,5   12
Max. ambient temperature at sea level	°C	50	50	50	50	50
Min. starting temperature / (cold start Aid)	°C	-10 / -20	-10 / -20	-10 / -20	-10 / -20	-10 / -20
Engine						
Model		KUBOTA V 1505 T	KUBOTA V 1505 T	KUBOTA V 1505 T	KUBOTA V 1505 (T)	KUBOTA V 1505 T
Number of cylinders		4	4	4	4	4
Power output @ normal shaft speed	kW	33	33	33	26,5 (33)	33
Nominal speed	rpm	3000	3000	3000	3000	3000
Unload speed	rpm	1850	1850	1850	1850	1850
Capacity						
Engine oil	l	5,5	5,5	5,5	5,5	5,5
Compressor oil	l	7,7	7,7	7,7	7,7	7,7
Fuel tank capacity	l	60	60	60	60	60
Noise level						
Sound power level (LwA)	dB(A)	98	98	98	98	98
Sound pressure level (LpA) at 7m	dB(A)	70	70	70	70	70
Dimensions and weight (box unit / undercarriage)						
Length	mm	1940 / 2290	1940 / 2290	1940 / 2290	1940 / 2290	1940 / 2290
Width	mm	1180 / 1350	1180 / 1350	1180 / 1350	1180 / 1350	1180 / 1350
Height	mm	1150 / 1400	1150 / 1400	1150 / 1400	1150 / 1400	1150 / 1400
Weight (box / portable)	kg	650 / <750	650 / <750	650 / <750	650 / <750	650 / <750

## ISO STANDARDS

Atlas Copco's fully implemented Quality Management and Environmental Management systems in the design and manufacturing of these units fulfill the requirements of ISO 9001 and ISO 14001 & OHSAS 18001. The range has also been given the certificate tested according to ISO 1217:2009-annex D.



[www.atlascopco.com](http://www.atlascopco.com)

## 8 step simple service

<p><b>1</b></p> <p>Draining all liquids</p>  <p>Centralized draining point</p>	<p><b>2</b></p> <p>Drain and replace compressor oil</p>  <p>Accessible drain point below vessel</p>	<p><b>3</b></p> <p>Drain and replace engine oil</p>  <p>Easy inlet pour</p>	<p><b>4</b></p> <p>Replace engine air filter</p>  <p>Easy clip in changeable filter</p>
<p><b>5</b></p> <p>Replace compressor air filter</p>  <p>Easy clip in changeable filter</p>	<p><b>6</b></p> <p>Replace engine oil filter</p>  <p>Easily accessible spin on engine oil filter</p>	<p><b>7</b></p> <p>Replace compressor oil filter</p>  <p>Easily accessible spin on compressor oil filter</p>	<p><b>8</b></p> <p>Replace compressor separator element</p>  <p>Easily accessible spin on separator element</p>



**All this can be done in minutes – not hours, with no special tools needed**



**Fully guaranteed service costs**

**2 OR 3 YEAR PLAN**  
**1€**  
**LESS THAN PER DAY**

## It's all about the numbers



reddot design award  
winner 2017

LIGHTER THAN  
COMPARABLE  
MODELS **150KG**

**10** MODELS  
FLOWS FROM  
⇒ 2-5 m<sup>3</sup>/min ⇒

**1** COMPLETELY  
NEW SCREW ELEMENT

**12%** MORE  
FUEL EFFICIENT

UNDER 60 MINUTES  
SERVICE TIME

OIL SERVICE  
ONCE IN 2 YEARS

EVERY MODEL BELOW  
**750kg**

With full fuel tank, generator and  
aftercooler, ZERO extra driving  
licenses needed to tow ANY model

**15%** SMALLER  
FOOTPRINT

**11** YEARS  
DEVELOPMENT  
HARDHAT®  
CANOPY

**100%** GUARANTEED  
BUY-BACK VALUE

## Portable Energy Solutions Portfolio

### AIR COMPRESSORS

#### READY TO GO

- 1-5 m<sup>3</sup>/min
- 7-12 bar



#### VERSATILITY

- 7-22 m<sup>3</sup>/min
- 7-20 bar



#### PRODUCTIVITY PARTNER

- 19-116 m<sup>3</sup>/min
- 10-345 bar



Diesel and electric options available.

### GENERATORS

#### PORTABLE

- 1,6-13,9 kVA



#### MOBILE

- 9-1250\* kVA



#### INDUSTRIAL

- 10-1250\* kVA



\*Multiple configurations available to produce power for any size application.

### DEWATERING PUMPS

#### ELECTRIC SUBMERSIBLE

- 275-16.500 l/min



#### CENTRIFUGAL DIESEL DRIVEN

- 833-9833 l/min



#### SMALL PORTABLE

- 210-2500 l/min



### LIGHT TOWERS

#### LED



#### METAL HALIDE



#### ELECTRIC



Portfolio and options available can change depending on the market.

## Committed to sustainable productivity

Atlas Copco's Portable Energy division has a forward-thinking philosophy. For us, creating customer value is all about anticipating and exceeding your future needs – while never compromising our environmental principles. Looking ahead and staying ahead is the only way we can ensure we are your long term partner.

[www.atlascopco.com](http://www.atlascopco.com)

Atlas Copco

Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.

2858 0960 03 - © 2017 Atlas Copco Portable Energy All rights reserved. ® Atlas Copco is a registered trademark of Atlas Copco AB