



## BACKHOE LOADER | 3CX/4CX ECO

Gross power 68.6kW (92hp) – 74.2kW (100hp) | Dig depth 4.45 (14-7) – 6.12 (20-1) | Maximum shovel capacity: 1.0m<sup>3</sup> – 1.3m<sup>3</sup>



# COST OF OWNERSHIP AND EFFICIENCY.

THE LATEST 3CX AND 4CX BACKHOES DON'T JUST PROVIDE YOU WITH THE POWER TO GET THINGS DONE; THEY ALSO OFFER YOU COUNTLESS FEATURES TO ENSURE THAT PERFORMANCE IS EFFICIENT, AND OWNERSHIP COSTS ARE REDUCED.

## An efficient drivetrain.

**1** By producing high levels of power and torque even at engine speeds as low as 1,200rpm, DIESELMAX can provide fuel-efficient matching of transmission and hydraulics.

**2** JCB EcoRoad technology is designed to provide the highest efficiency and productivity levels possible when roading. Featuring JCB's patented TorqueLock technology (the world's first lock-up torque converter fitted to a backhoe loader), EcoRoad actually reduces fuel consumption by up to 25% whilst increasing speed by up to 10%, and working area by up to 10%.

**3** At the loader end of our ECO machines, thanks to EcoLoad along with high lift capacities and breakout forces, and of course the outstanding DIESELMAX engine, you can count on lifting and shifting more, faster - these are the most efficient loaders in their class.

JCB pioneered the backhoe loader in 1953. Since then, we've remained the market leader, inventing features like 4WD and the side-shift chassis.

As the market leader, JCB sells around half of all the world's backhoe loaders.



1



2



3

**Residual benefits.**

4 Our DIESELMAX engine can run on lower-grade fuels, which makes the 3CX and 4CX easily resalable across different territories. This, of course, boosts residuals.

A JCB 3CX or 4CX is a great asset in many respects, not least financially – huge global demand, plus legendary productivity, plus superb build quality equals maximum resale value.

**Added efficiency.**

5 JCB's efficient design philosophy looks at every aspect of our machines, applying innovative technologies to squeeze the absolute maximum out of every drop of fuel and making the 3CX and 4CX ECO our most efficient backhoes ever.


The result of these innovations is that in typical roading, loading, excavating and idle cycles our backhoe loaders deliver an average fuel saving of up to 16%, plus lower emissions and noise levels.

6 High back-off brakes reduce viscous drag during roading and rehandling, which in turn improves economy by up to 2%.



# QUALITY, RELIABILITY AND DURABILITY.

THE LATEST JCB 3CX AND 4CX ECO MACHINES ARE DESIGNED FOR HARD WORK. THEY'RE MADE USING ONLY THE VERY FINEST MATERIALS AND PROCESSES, WHICH ARE TESTED, TRIED AND PROVEN TO EXCEL. THEY'RE ALSO PROTECTED FROM THE INEVITABLE RIGOURS OF SITE LIFE.

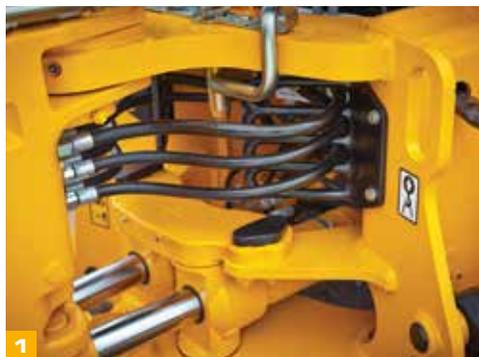

## Damage limitation.


1 To stop the 3CX or 4CX's kingpost hoses from snagging and sustaining damage, we enclose them in a flexible, robust guide.

2 The steering ram on the 3CX is protected from impact damage whilst loading, because it's mounted behind the front axle.

3 To protect boom and dipper hoses from the perils of trenchwork, we've enclosed them inside the rear structures of the machine.

4 The clam rams on our 3CX and 4CX machines are ultra-reliable because they're protected from debris when loading by optional JCB clam shovel ram guards.

5 To safeguard from impact damage on site, the 3CX and 4CX are now available with rear light guards.

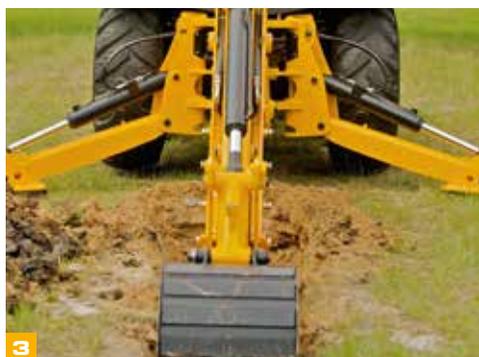

### Built to last.

**6** For added rigidity – and to protect hoses from damage – a 3CX or 4CX has flat plate-depressed loader arms, while cat tail welds reduce stress concentrations.

**7** The plastic fuel tank on the 3CX and 4CX is completely rustproof for ultimate fuel injection system protection.

**8** The single-piece composite cab floor on these backhoes is also rustproof, and has moulded water channels.

**9** JCB's robot welded single-piece chassis maximises strength and minimises weight.

### Tested to the limits.

**10** All the materials with which we construct our backhoe loaders are tested to the very max. By exposing those materials to extreme temperatures, chemicals, salt, oil and light, we know they'll survive the most hostile conditions.

**11** To prove the durability of our DIESELMAX engines, we've tested them for 110,000 hours in 70 different machines across the toughest applications and environments.


The axles and transmissions of JCB 3CXs and 4CXs are built for a 12,000-hour life, with the heavyweight axles designed to withstand massive shock loads. The rear axle alone has a static load rating of 25,000kg, and a dynamic load rating of 12,500kg.



6



10

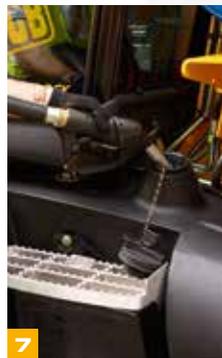

7



8



9



11

# PRODUCTIVITY AND PERFORMANCE.

JCB BACKHOES HAVE ALWAYS LED THE WAY IN POWER AND PERFORMANCE, AND OUR LATEST 3CX AND 4CX MODELS ARE NO EXCEPTION. IN EVERY RESPECT – FROM DIGGING TO LIFTING AND MANOEUVRING – THESE MACHINES WILL MAXIMISE YOUR PRODUCTIVITY.

## A productive drivetrain.

1 Choose from three engines to suit your requirements – with 63kW, 68.6kW and 74.2kW options, you can balance ultra efficiency against ultimate performance.

2 To give your 3CX or 4CX even greater traction and performance, as well as reduced tyre wear, opt for our automatic limited slip differential traction control.

## Innovative hydraulics.

3 EcoLoad also features a Hydraulic Speed Control (HSC) switch which – combined with high torque at low engine speed from our DIESELMAX engine – gives more tractive effort, faster cycle times, excellent pushing power and hill climbing performance.



For enhanced loading performance and smoother gear changes, we offer a 6-speed gearbox with low ratio first and second gears.

With a 160-litre fuel tank, the 3CX and 4CX ECO machines are designed to do a huge amount of work between refills.



### Digging further.

A 3CX or 4CX ECO's 4-ram self-levelling loader automatically adjusts the shovel on both raise and lower cycles without any need for manual adjustment. It also provides unhindered front shovel visibility, especially when loading at height.

The JCB return-to-dig feature means operators can quickly reset the shovel to dig.


4 To ensure an extra 1.2m dig depth and reach – and to minimise repositioning – the 3CX and 4CX are fitted with our inner box design Extradig feature.

Both the 3CX and 4CX ECO boast high ground clearances of up to 370mm, together with 20° departure angles. This means operators can work easily on steep slopes and uneven ground at maximum productivity.

### JCB 4CX: the ultimate backhoe loader.

5 Boasting unparalleled power, performance and versatility, the JCB 4CX ECO is the ideal machine for just about any application, from road-building to house-building, waste recycling and landscaping.

6 The 4CX ECO's large optional 1.3m<sup>3</sup> shovel capacity along with 3 steering modes provide exceptional on-site productivity.

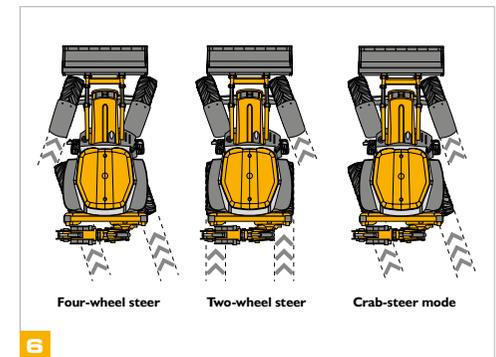

## COMFORT AND EASE OF USE.

IN ORDER TO HELP YOU REAP THE MAXIMUM BENEFIT OF THE 3CX AND 4CX'S SUPERIOR PERFORMANCE, WE'VE DESIGNED THESE MACHINES TO BE ALL-DAY COMFY, ERGONOMIC AND EXTREMELY INTUITIVE FOR OPERATORS TO USE.

### A great place to work.

All our ECO backhoes have low noise levels, with our 68.6kW (92hp) engine model offering the quietest operation.

**1** To help operators get to work quickly and safely, our optional heated front screen/heated mirrors remove any built-up frost and ice without the need to climb across the machine on cold mornings. A cab pre-heating option can be set to warm the cab automatically without starting the engine.



**2** There's storage aplenty in our 3CX and 4CX cabs; work tools are easy to carry, the cab environment is well-organised and, on A/C models, there's an in-cab cool box for food and drinks.




**3** For added comfort and reduced material spillage, JCB's SmoothRide System minimises bounce during travel.



**4** Exclusive to JCB backhoe loader, we have integrated a hot drinks machine option into the cab to provide you with a delicious cup of hot tea or coffee throughout the day.

JCB's single piece glass provides optimum visibility across the work area of a 3CX or 4CX ECO, while our narrow front bonnet allows extra visibility to the front shovel and wheels.



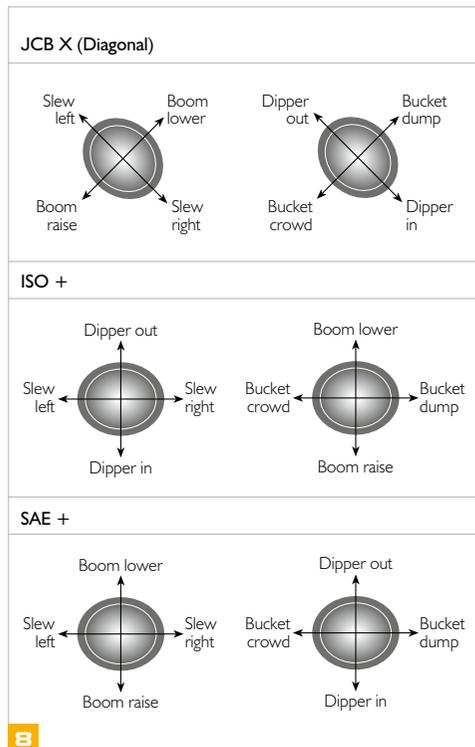

### Maximum manoeuvrability.

The 3CX and 4CX have optional LSD to stop wheelspin in difficult ground conditions, inturn reducing tyre wear.

**5** Efficient, safe stopping power requires minimal pedal effort because of the 3CX and 4CX ECO's power brakes.

### Always in control.

**6** The EcoDig system is controlled by a two-position rocker switch on the main console in the cab. This control offers the operator a choice between an ECO mode, maximum efficiency and digging potential mode, or Lo mode, an ultimate machine control for fine grading, lifting and delicate groundworks profiling applications.

**7** JCB's ergonomic seat-mounted excavator-style controls (a standard-fit on our Easy and Advance Easy Control machines) make for great manoeuvrability, fingertip control and supreme comfort.

**8** So that operators feel right at home in the 3CX/4CX ECO, we fit a traditional manual control system as standard, with a choice of three control patterns – JCB X, SAE+ and ISO+.

With joystick-controlled loader operations on Advanced EasyControl, it's comfortable, logical and easy to control the loader end of a 3CX or 4CX.



## SECURITY AND SERVICEABILITY.

AS THE WORLD'S NUMBER ONE BACKHOES, THE 3CX AND 4CX ARE BLESSED WITH SUPREME POWER AND PRODUCTIVITY. TO BALANCE ALL THAT PERFORMANCE AND DESIRABILITY, THERE'S SAFETY, SECURITY AND SERVICEABILITY APLENTY TOO.



### Safe and secure.

**1** A stabiliser warning system\* lets 3CX and 4CX operators know if the stabilisers aren't fully retracted when the machine is on the move.

**2** The 3CX and 4CX ECO are safe machines to get in and out of, with large anti-slip steps of an open grille design to stop material build-up.

**3** To keep operators safe even when using powered attachments, we fit an impact-protected rear screen\* to these backhoes. This also makes glass replacement easy.

**4** There's a large lockable toolbox onboard for safe storage.

**5** Punctures are a fact of life on site, which is why the 3CX and 4CX feature optional liquid fill tyres for a fast repair.

\* Optional



### Safety.

6 An optional JCB keypad immobiliser adds to machine protection and allows the operator to key in a sequence of numbers to activate the starting of the machine. An alternative option to this is the unique JCB key featuring a built-in circuit chip – each backhoe loader can only be started by its' own, unique key.

### Serviceability.


To save more time and effort, these backhoes are designed to offer grouped single-side servicing.

7 Our one-piece bonnet is easy to lift, and there's no need to remove extra side panels.

8 Refuelling of a 3CX or 4CX can be done from ground level.

We've got a patented rear stabiliser wear pad design, with fast and simple adjustment.

9 JCB LiveLink telematics can provide an array of information to optimise fleet management and machine reliability.

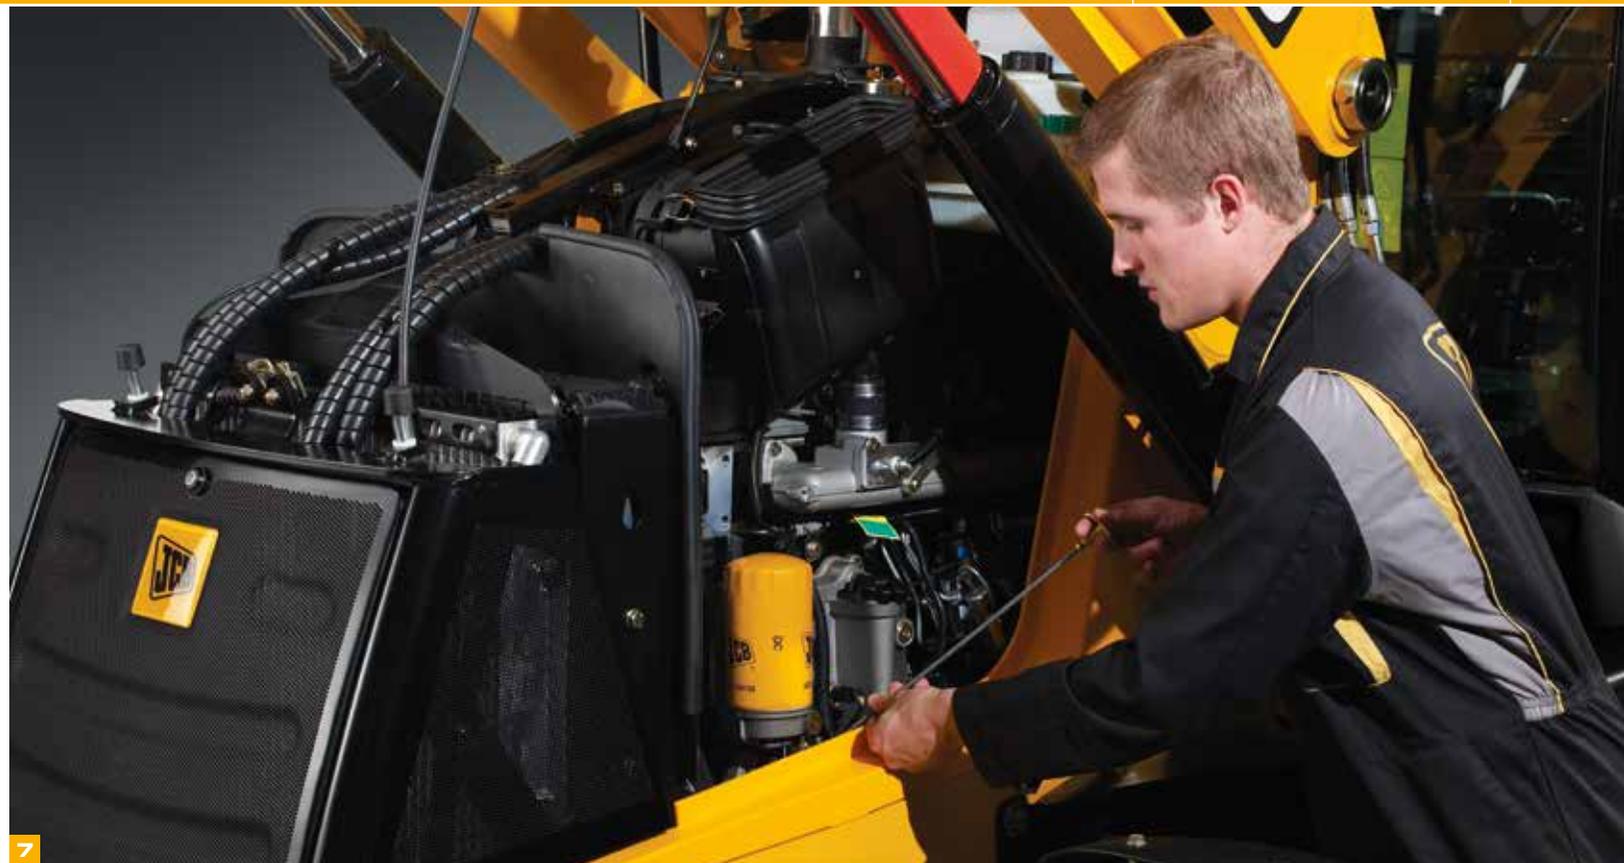

## THE OPTIONS LIST.

A BACKHOE LOADER IS, BY ITS VERY NATURE, A HIGHLY VERSATILE MACHINE, BUT OUR OPTIONAL EXTRAS MAKE IT ALL THE MORE SO, ALLOWING YOU TO TAILOR YOUR 3CX OR 4CX TO A HUGE ARRAY OF DIFFERENT APPLICATIONS.

### 6-in-1 shovel.

1 Equip your 3CX or 4CX with one of these and you can dig, doze, load, grab, grade and backfill without having to switch attachments.

### Front bumper protection bars.


2 The 3CX can be equipped with front protection bars, protecting the bonnet and front grill from damage when loading into lorries and trailers.

### Excavator lifting kit.

3 This lifting kit means you can use a 3CX or 4CX ECO's excavator arm as a crane for object handling. Optional hose burst check valve (HBCV) on the boom, together with an audio warning alarm, are available.

### Hose reel.

4 The unique ability of a JCB backhoe to provide an independent hydraulic circuit for handheld tools is nothing new. But our 9m hose reel option means you get even greater working radius, while the reel design reduces the potential for on-site damage and protects the hose when it's not being used. Handheld tools and the excavator can be operated simultaneously for increased productivity; this also removes the need for separate powerpacks – traditionally a theft risk. The hose reel meets EHTMA Class C tool operation standards and features low back pressures, 138 bar pressure and a 20 l/min flow rate.

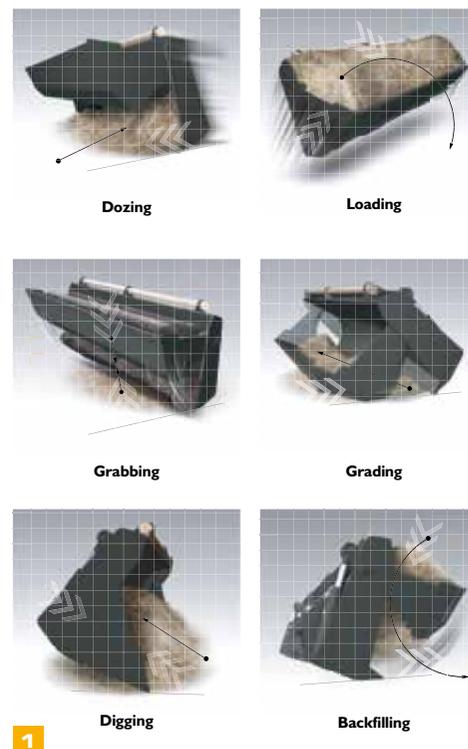

### Hydraulic thumb.

⊞ This feature increases the versatility of your 3CX or 4CX because its profiled edge is ideal for handling round objects and awkward materials – logs, pipes or scrap metal, for example.

### Combined hammer and bi-directional unit.

⊞ Increasing attachment compatibility and versatility, this brand new option provides both low-flow and high-flow hydraulic power, with low back pressure maintaining optimum flow to the attachment. The circuit operates independently of the extending dipper and is capable of operating a wide range of single and double acting attachments. Hammer only, or hammer and bi-directional options are available.

### Knuckleboom.

⊞ The 4CX ECO features a knuckleboom option (4CN) which has a 30° articulation angle between the boom and dipper giving a working envelope of 240°. This allows you to dig in areas simply not possible with a conventional backhoe, such as around objects like tress, telegraph poles or lamp posts; parallel alongside a road while keeping the machine on the road; or even towards the front of the machine.

### Hydraulic quickhitch.


⊞ Our latest quickhitch makes attachment changing quick, safe and compliant with both current and future legislation.

### Integral shovel street pads.

⊞ This new option prevents ground damage and, therefore, costly repairs.



5

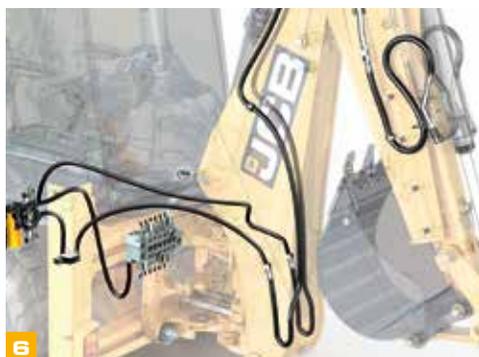


6



7



8

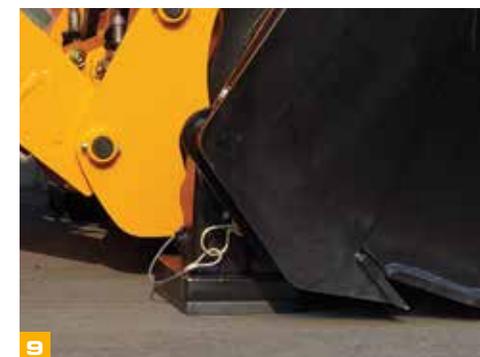

9

# LIVELINK, WORK SMARTER.

**LIVELINK IS AN INNOVATIVE SOFTWARE SYSTEM THAT LETS YOU MANAGE JCB MACHINES REMOTELY – ONLINE, BY EMAIL OR BY MOBILE PHONE. ACCESS EVERYTHING FROM MACHINE ALERTS TO HISTORY INFORMATION, WITH ALL DATA STORED AT A SECURE CENTRE.**

## Productivity and cost benefits

You can monitor and manage your machines fuel level throughout the day using the analysis function. LiveLink has a comprehensive reporting tool allowing you to manage your machines up time and utilisation to get the most of your machine.



## Maintenance benefits

Manage machine maintenance easily – accurate hours monitoring and service alerts improve maintenance planning, while real-time location data helps you manage your fleet. Critical machine alerts and maintenance history records are also available.



## Security benefits

LiveLink's real-time geofencing alerts tell you when machines move out of predetermined zones, and real-time curfew alerts inform you of unauthorised usage, straight to your mobile phone. Further benefits include real-time location information, and LiveLink has its own internal battery and aerial.



Note: LiveLink features are model dependent, check machine specifications.

## VALUE ADDED.

JCB'S WORLDWIDE CUSTOMER SUPPORT IS FIRST CLASS. WHATEVER YOU NEED AND WHEREVER YOU ARE, WE'LL BE AVAILABLE QUICKLY AND EFFICIENTLY TO HELP MAKE SURE YOUR MACHINERY IS PERFORMING TO ITS FULL POTENTIAL.



1

1 Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes.

2 The global network of JCB Parts Centres is another model of efficiency; with 16 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.




2


3 JCB Assetcare offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our maintenance teams around the world charge competitive labour rates, and offer non-obligation quotations as well as fast, efficient insurance repair work.



3

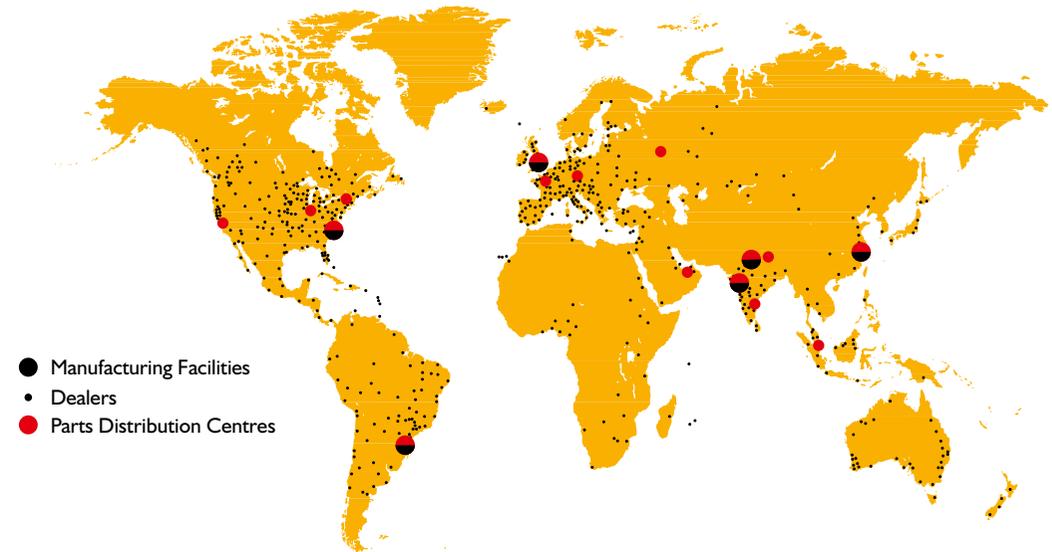

## STATIC DIMENSIONS

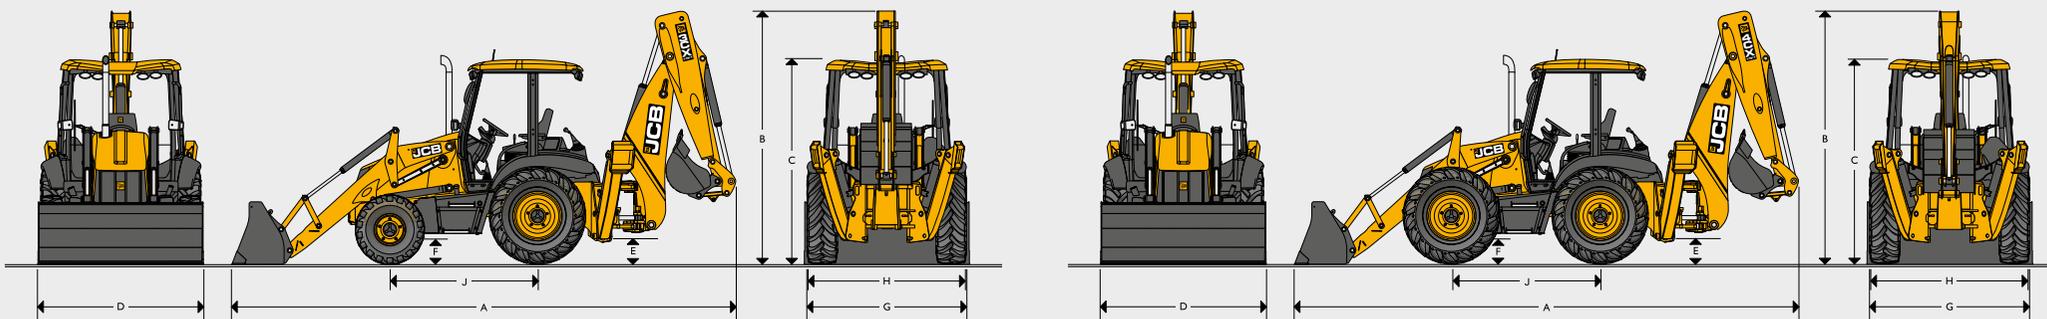

## STATIC DIMENSIONS

Machine model		3CX 14ft	3CX Super	3CX 15ft	4CX 14ft
Drive		4WD	4WD	4WD	4WD
A	Transport length	m (ft-in)	7.19 (23-7)	7.19 (23-7)	7.37 (24-2)
B	Transport height – fixed dipper	m (ft-in)	3.43 (11-3)	3.43 (11-3)	3.43 (11-3)
	Transport height – Extradig	m (ft-in)	3.53 (11-7)	3.53 (11-7)	3.53 (11-7)
C	Height to top of cab	m (ft-in)	2.87 (9-9)	2.86 (9-4)	2.87 (9-9)
D	Overall width with shovel	m (ft-in)	2.45 (7-8)	2.45 (7-8)	2.45 (7-8)
E	Ground clearance – mainframe	m (ft-in)	0.33 (1-1)	0.33 (1-1)	0.34 (1-1.4)
F	Ground clearance – front axle	m (ft-in)	0.28 (0-11)	0.28 (0-11)	0.45 (1-5.7)
G	Front wheel track	m (ft-in)	2.25 (7-4)	2.22 (7-3.5)	2.22 (7-3.5)
H	Rear wheel track	m (ft-in)	2.21 (7-3)	2.22 (7-3.5)	2.22 (7-3.5)
J	Wheelbase	m (ft-in)	2.21 (7-3)	2.17 (7-1)	2.31 (7-7)

## ENGINE (STAGE II/STAGE IIIB)

Machine model		3CX-14	3CX-14 SUPER	3CX 15ft	4CX 14ft
Manufacturer		JCB	JCB	JCB	JCB
Aspiration		Turbocharged	Turbocharged	Turbocharged & Intercooler	Turbocharged & Intercooler
Displacement	litre	4.4	4.4	4.4	4.4
No. of cylinders		4	4	4	4
Bore	mm	103	103	103	103
Stroke	mm	132	132	132	132
Rated engine	rpm	2200	2200	2200	2200
<b>Power ratings</b>					
Rated ISO 14396 (SAE J1995 Gross)	hp (kW)	68.6 (92)	68.6 (92)	74.2 (100)	74.2 (100)
<b>Maximum torque</b>		Stage II / Stage IIIB	Stage II / Stage IIIB	Stage II / Stage IIIB	Stage II / Stage IIIB
Rated ISO 14396 (SAE J1995 Gross)	Nm (lb-ft)	400 (295)/408 (301)	400 (295)/408 (301)	425 (314)/440 (325)	425 (314)/440 (325)
Max. Torque	rpm	1200	1200	1300	1300

**ELECTRICAL AND INSTRUMENTATION**

Gauges	Tachometer, engine coolant temp, fuel level, hourmeter, clock
Warning system	Audible and visual system. Engine oil, water in fuel, transmission oil temperature and pressure, park brake, air cleaner, alternator
Battery	900 CCA/110 A/hr
Pre-wire	Radio speakers (cab), beacon (all)
Horn	Controlled from both front and rear
Alternator	95 amp standard
Front working lights	4 adjustable
Rear working lights	4 adjustable

**OPERATING WEIGHTS**

Machine model		3CX 14ft	3CX Super	3CX 15ft	4CX 14ft
Fixed dipper + GP shovel	kg (lb)	7370 (16250)	7370 (16250)	7725 (17000)	7950 (17500)
Extended dipper + 6-in-1 shovel	kg (lb)	8070 (17800)	8070 (17800)	8425 (18550)	8660 (19092)

**ENGINE SUPPORT SYSTEM**

Fuel type	Diesel
Fuel filter	Replaceable cartridge plus water/sediment separator prefilter
Air cleaner	Dual, dry element type, with self cleaning internal air intake precleaner
Oil filter and lubrication	Full flow, spin-on type filter
Cooling system	Hot climate specification, pressurised 1.0 bar suction fan. Pressurised recovery tank with integral filler neck

**TRANSMISSION**

Model	3CX 14ft		3CX Super		3CX 15ft		4CX 14ft	
Manufacturer	JCB	JCB	JCB	JCB	JCB	JCB	JCB	JCB
Type	Syncroshuttle	Powershift	Syncroshuttle	Powershift	Powershift	Autoshift	Powershift	Autoshift
Gear selection	Manual	Powershift	Manual	Powershift	Powershift	Powershift	Powershift	Powershift
TorqueLock	N/A	Optional	N/A	Optional	Optional	Optional	Optional	Optional
Torque convertor	2.54:1	2.54:1	2.54:1	2.54:1	2.54:1	2.54:1	2.54:1	2.54:1
Gears F/R	4/4	4/4	4/4	4/4	4/4	6/4	4/4	6/4
<b>Travel speeds</b>	kph (mph)							
Gear 1	6.2 (3.9)	5.4 (3.4)	5.7 (3.5)	4.9 (3.0)	5.4 (3.4)	5.1 (3.2)	5.0 (3.1)	4.9 (3.0)
Gear 2	10.0 (6.2)	10.0 (6.2)	9.1 (5.7)	8.6 (5.3)	10.0 (6.2)	8.6 (5.3)	9.3 (5.8)	8.1 (5.0)
Gear 3	21.3 (13.2)	22.5 (14.0)	19.6 (12.2)	19.8 (12.3)	22.5 (14.0)	11.6 (7.2)	21.5 (13.4)	11.0 (6.8)
Gear 4	39.8 (24.7)	38.3 (23.8)	37.1 (23.1)	37.1 (23.1)	38.3 (23.8)	18.7 (11.6)	38.1 (23.7)	17.7 (11.0)
Gear 5	-	-	-	-	-	31.1 (19.3)	-	29.6 (18.4)
Gear 6	-	-	-	-	-	38.3 (23.8)	-	38.1 (23.7)

## FRONT AXLE

Model	3CX 14ft/3CX 15ft	3CX Super	4CX 14ft
Type	JCB steer drive with torque proportional	JCB 4WD steer drive with torque proportional	JCB epicyclic hub reduction with torque proportional
Limited slip	-	-	Option
Axle ratings	kg	kg	kg
Static load rating	16500	25000	25000
Dynamic load rating	8300	12500	12500
Oscillation angle	16°	16°	16°

## REAR AXLE

Model	3CX 14ft/3CX 15ft	3CX Super	4CX 14ft
Type	JCB epicyclic hub reduction with torque proportional	JCB 4WD steer drive with torque proportional	JCB epicyclic hub reduction with torque proportional
Limited slip	Option	Option	Option
Axle ratings	kg	kg	kg
Static load rating	25000	25000	25000
Dynamic load rating	12500	12500	12500

## STEERING

Model	3CX 14ft/3CX 15ft	3CX Super	4CX 14ft
Axles	Steer drive	Steer drive	Steer drive
Steering turns - lock to lock	2¾ m	2¾ m	2¾ m
Kerb - kerb turning circle - unbraked	8.1	9.35	9.1
Loader clearance circle - unbraked	10.4	11.15	10.7
Kerb - kerb turning circle - braked	6.9	8.0	8.0
Loader clearance circle - braked	9.5	9.5	9.5

(Depending on tyre size, ground conditions etc.)

## SERVICE CAPACITIES

Model		3CX All models	4CX All models
Cooling system	ltr	18.5	18.5
Fuel tank	ltr	160	160
Engine oil with filter	ltr	15	15
Gearbox with filter	ltr	16	16
Rear axle	ltr	16	16
Front drive axle	ltr	16	16
Hydraulic system incl. tank	ltr	117	117

## OPTIONAL ACCESSORIES

Key/keypad immobiliser, Sitemaster or Michelin brands of tyres with a selection of traction/industrial tread in a crossply/radial construction, Powershift/Autoshift transmissions, JCB TorqueLock, Standard excavator buckets (300mm to 900mm), Deep profile excavator buckets (300mm to 940mm), Ditching buckets, General purpose/6-in-1 front shovels, Manual/ hydraulic front quickhitch, Manual/hydraulic rear quickhitch, 3/8" loader arm pipework/5/8" loader arm pipework, Hammer/ bi-directional pipework, Hand held tool circuit, 9m hose reel, Excavator lifting kits for non-EN474 territories, Loader/ excavator HBCV's, Electric refuelling pump, Heated front screen, Heated mirrors, Reverse alarm, Coffee machine, Grid heaters, Eberspacher cold start kits, Front bumper protection, Fire extinguisher, Fuel tank guards, Air suspension seat, Seat headrest, Biodegradable oil, Black/yellow trim kits, Instrument panel vandal guard, Different size front counterweights, Stabiliser streetpads, Shovel streetpads, Rear light guards, Lubricity filter, Shovel clam ram guards, Dual pattern controls (ISO/SAE changeover), Extendable steer column, Air conditioning, SRS.

## HYDRAULIC SYSTEM - 3CX

Pump flows*	3CX 14ft	3CX 14ft/3CX Super	3CX 15ft
<b>Open centre systems (Gear pumps) @ 1750 rpm</b>	l/min	l/min	l/min
Manual Control (Gear pump)			
Pump 1	58	63	65
Pump 2 & 3	71	81	89
EasyControl			
Pump 1	-	63	65
Pump 2 & 3	-	81	89
<b>Closed centre systems (Piston pump) @ 2200 rpm</b>	l/min	l/min	l/min
Advanced EasyControl	-	-	165 (32.3)
	bar (lbf/sq in)	bar (lbf/sq in)	bar (lbf/sq in)
System relief pressure	251 (3650)	251 (3650)	251 (3650)


\*Optimum flow \*\*Territory specific

## HYDRAULIC SYSTEM - 4CX

Pump flows*	4CX 14ft
<b>Open centre systems (Gear pumps) @ 1700 rpm</b>	l/min
Manual Control (Gear pump)	
Pump 1 & 3	82
Pump 2	73

\*Optimum flow

## LOADER DIMENSIONS


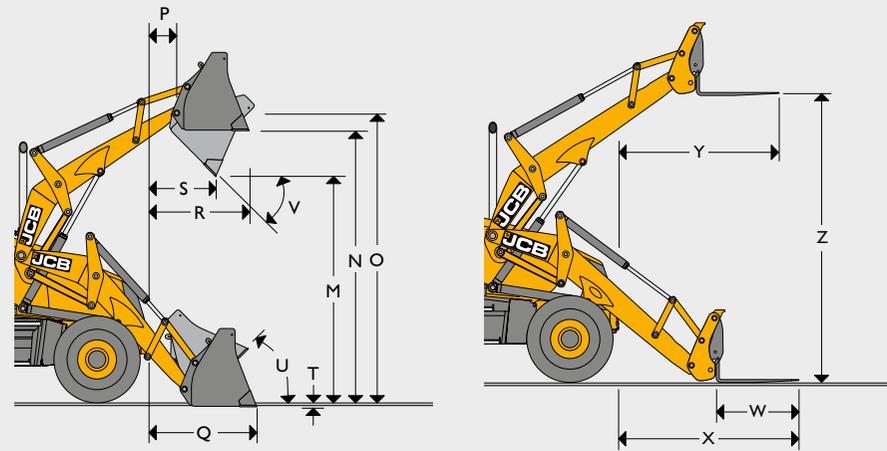


			3CX 14ft/3CX 15ft		3CX Super		4CX 14ft	
			GP shovel	6-in-1 shovel	GP shovel	6-in-1 shovel	GP shovel	6-in-1 shovel
M	Dump height	m	2.74	2.72	2.64	2.64	2.69	2.69
N	Load over height	m	3.23	3.20	3.16	3.13	3.21	3.18
O	Loader hinge pin height	m	3.45	3.45	3.41	3.41	3.46	3.46
P	Pin forward reach	m	0.36	0.36	0.47	0.47	0.41	0.41
Q	Reach at ground (toe plate horizontal)	m	1.42	1.37	1.52	1.50	1.42	1.39
R	Max. reach at full height	m	1.20	1.15	1.26	1.22	1.21	1.17
S	Reach at full height fully dumped	m	0.83	0.78	0.88	0.82	0.82	0.76
T	Dig depth	m	0.07	0.10	0.18	0.23	0.14	0.18
U	Roll back at ground	degrees	45°	45°	45°	45°	45°	45°
V	Dump angle	degrees	43°	43°	44°	44°	45°	45°
	Jaw opening width	m	-	0.95	-	0.95	-	0.95

## LOADER PERFORMANCE

Model		3CX 14ft		3CX Super/3CX 15ft		4CX 14ft	
		GP shovel	6-in-1 shovel	GP shovel	6-in-1 shovel	GP shovel	6-in-1 shovel
Shovel breakout force	kgf	6170	6531	6227	6590	6227	6590
Loader breakout force	kgf	4942	4732	5936	5730	5730	5936
Lift capacity	kgf	3479	3229	4638	4378	4638	7378
6-in-1 clamp force	kg		2940		2945		2945

BACKHOE DIMENSIONS

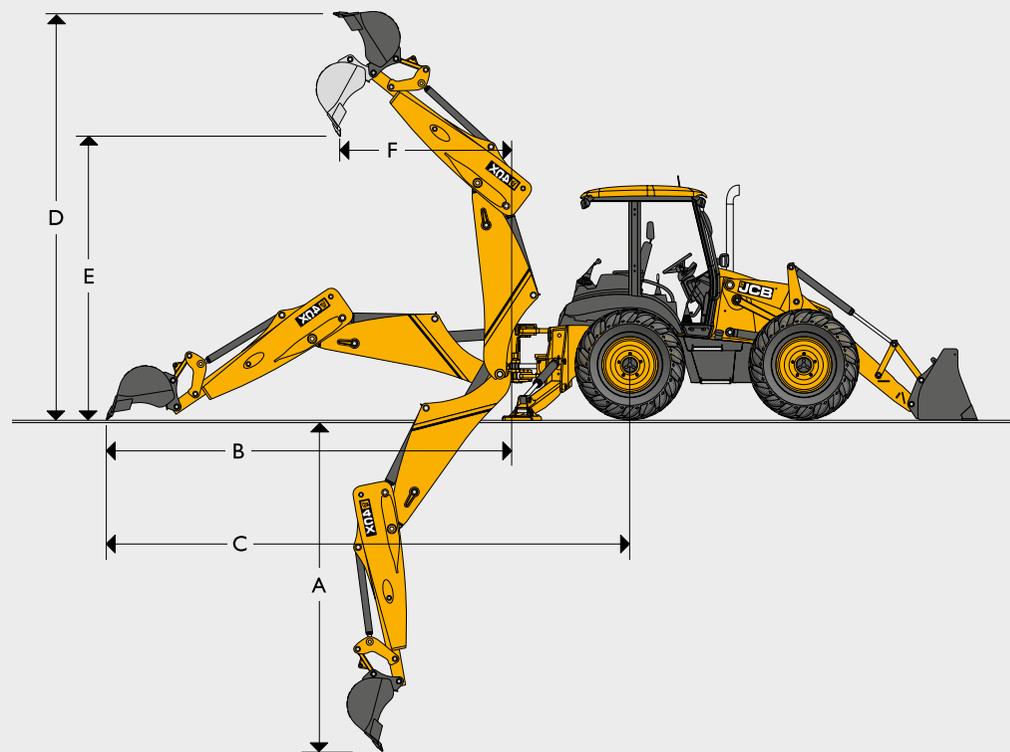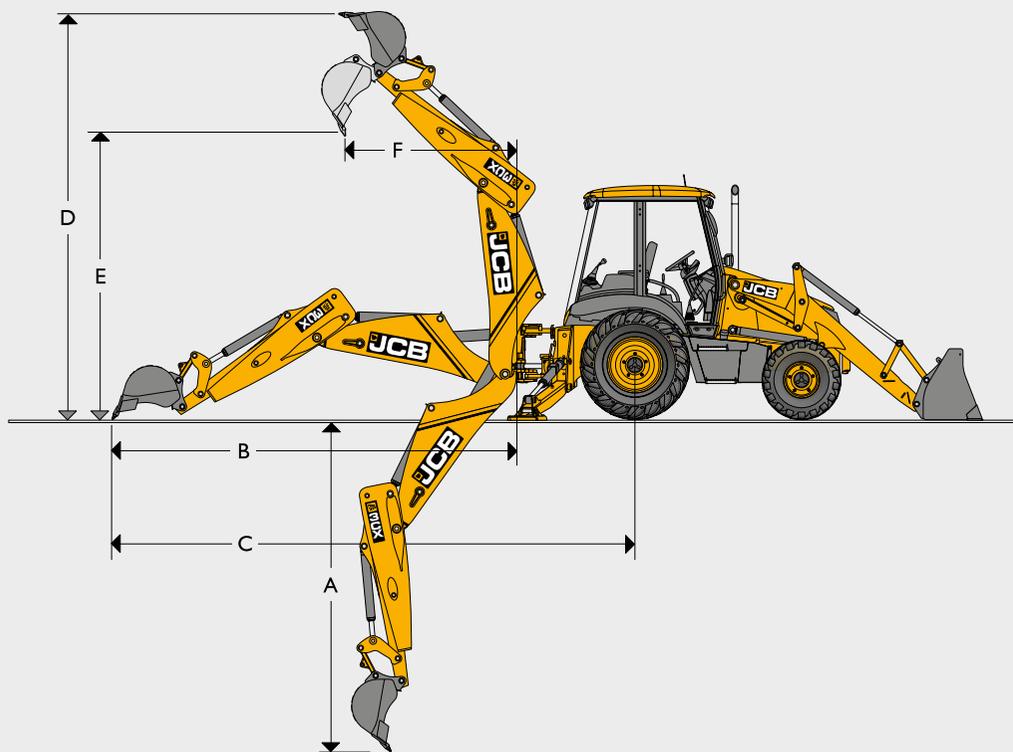

BACKHOE DIMENSIONS


Machine model		3CX 14ft, 3CX Super, 4CX 14ft			3CX 15ft	
		Standard Backhoe	Extradig – Retracted Extradig	Extradig – Extended	Extradig – Retracted Extradig	Extradig – Extended
SAE max dig depth						
A	SAE max dig depth	m (ft-in)	4.45 (14-7)	4.45 (14-7)	5.63 (18-6)	6.12 (20-1)
	SAE 2ft flat bottom	m (ft-in)	4.39 (14-5)	4.39 (14-5)	5.59 (18-4)	6.10 (20-0)
B	Reach from swing pivot	m (ft-in)	5.44 (17-10)	(5.44) 17-10	6.55 (21-6)	7.01 (23-0)
C	Reach from rear axle center	m (ft-in)	6.63 (21-9)	(6.63) 21-9	7.77 (25-6)	8.20 (26-11)
D	Max operating height	m (ft-in)	5.38 (17-8)	(5.38) 17-8	6.25 (20-6)	6.40 (21-0)
E	Loading height	m (ft-in)	3.40 (11-2)	(3.40) 11-2	4.27 (14-0)	4.65 (15-3)
F	Loading reach	m (ft-in)	1.68 (5-3)	1.73 (5-5)	2.77 (9-1)	3.10 (10-2)
	Swing arc	degrees	180°	180°	180°	180°
	Stabilizers – transport	m (ft-in)	2.29 (7-6)	2.29 (7-6)	2.29 (7-6)	2.25 (7-4.75)
	Stabilizers – operating	m (ft-in)	3.30 (10-10)	3.30 (10-10)	3.30 (10-10)	3.30 (10-10)
	Leveling angle	degrees	15°	15°	15°	15°
	Bucket rotation	degrees				

185° Max Power / 201° Max Rotation

## BACKHOE PERFORMANCE

Machine model		3CX 14ft, 3CX Super	3CX 15ft	4CX 14ft
Bucket tearout	kgf (lbf)	6228 (13730)	7433 (16387)	7433 (16387)
Dipper tearout	kgf (lbf)	3903 (8605)	4647 (10245)	4849 (10690)
Lift capacity of bucket pivot at full reach	kgf (lbf)	2733 (6027)	3341 (7366)	3461 (7632)

## LOADER ATTACHMENTS – 6 in I Bucket Fork Dimensions

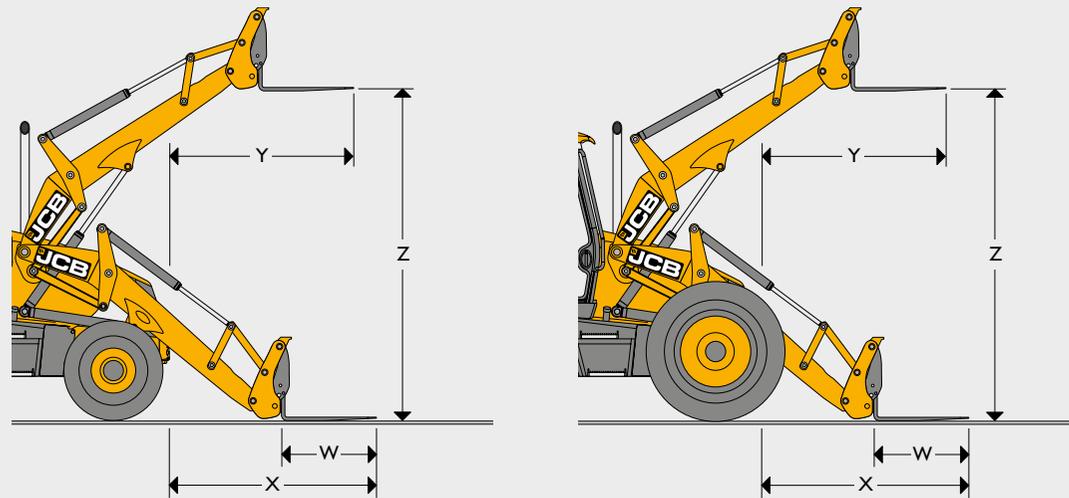

## LOADER ATTACHMENTS – 6-in-I Bucket Fork Dimensions

Machine model		3CX 14ft, 3CX Super, 3CX 15ft	4CX 14ft
		6-in-I bucket mounted forks	6-in-I bucket mounted forks
W	Forks – tine length	m (ft-in)	(1.07) 3-6
	Forks – tine length	m (ft-in)	0-3.3 (0.80)
X	Forks reach at ground level	m (ft-in)	(2.69) 8-10
Y	Forks reach at full height	m (ft-in)	(2.29) 7-6
Z	Forks lift height – max	m (ft-in)	(2.28) 9-3
	Fork spacing – min/max 10"	260 mm (10") to 1725 mm (68")	260 mm (10") to 1725 mm (68")

## BACKHOE PERFORMANCE

		3CX 14ft, 3CX Super, 3CX 15ft			4CX 14ft		
		Standard dipper		Extradig	Standard dipper		Extradig
Bucket tearout	kgf	Speed	5431	5385	5431	5385	
		Power	6324	6228	6324	6228	
Dipper tearout	kgf	Ext	–	2255	–	2729	
		Ret	3217	3225	3893	3903	
Lift capacity of bucket pivot at full reach	kg	Ext	–	719	–	1082	
		Ret	1584	1451	2046	1885	

\* Heavy Lift excavator

## BACKHOE ATTACHMENTS – Standard Profile Bucket

3CX & 4CX All models				
Width*	Capacity SAE		Weight (+ Teeth)	
	Rated m <sup>3</sup>	Struck m <sup>3</sup>	kg	Teeth
mm				
229	0.04	0.03	95	0
305 †	0.06	0.05	102	3
356 †	0.075	0.06	105	3
400 †	0.09	0.07	109	3
457 †	0.12	0.09	116	3
610 †	0.17	0.13	140	4
800 †	0.24	0.17	162	5
950 †	0.30	0.21	198	5

\* Including sidecutters. Width less sidecutters deduct 25mm.

† Available with additional wear strips to give added strength and rigidity.

## DITCHING BUCKETS

3CX All models			4CX All models			
Width*	Capacity SAE		Weight	Capacity SAE		
	Rated m <sup>3</sup>	Struck m <sup>3</sup>		Rated m <sup>3</sup>	Struck m <sup>3</sup>	Weight
mm			kg			kg
1525	0.22	0.155	150	0.22	0.16	150
1830	0.26	0.186	172	0.26	0.19	172

## TAPERED BUCKETS – 3CX &amp; 4CX All models

Width*	Capacity SAE		Angle degrees	Teeth
	Rated m <sup>3</sup>	Struck m <sup>3</sup>		
mm				
381–1676	0.07	0.06	30	2
305–1067	0.12	0.10	60	2

## BACKHOE ATTACHMENTS – Standard Profile Bucket

3CX All models					4CX All models				
Width*	Capacity SAE		Weight (+ Teeth)		Teeth	Capacity SAE		Weight (+ Teeth)	
	Rated m <sup>3</sup>	Struck m <sup>3</sup>	kg	Teeth		Rated m <sup>3</sup>	Struck m <sup>3</sup>	kg	Teeth
mm									
305	0.09	0.07	102	3	0.09	0.07	102	3	
356	0.11	0.09	117	3	0.11	0.09	117	1	
457	0.16	0.13	122	3	0.16	0.13	122	3	
610	0.23	0.18	142	4	0.23	0.18	142	4	
800	0.30	0.24	163	5	0.30	0.24	163	5	
950	0.38 †	0.30	183	5	0.38	0.30	183	5	
1100	0.48 †	0.34	203	6	0.48	0.34	203	6	

\* Including sidecutters. Width less sidecutters deduct 25mm (1 in).

† Capacity in cu.yd.





**ONE COMPANY, OVER 300 MACHINES.**

Your nearest JCB dealer

### 3CX/4CX Eco Backhoe Loader

Gross power: 68.6kW (92hp) – 74.2kW (100hp) Maximum dig depth: 4.45m – 6.12m

Maximum shovel capacity: 1.0m<sup>3</sup> – 1.3m<sup>3</sup>

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: [salesinfo@jcb.com](mailto:salesinfo@jcb.com)

Download the very latest information on this product range at: [www.jcb.com](http://www.jcb.com)

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

9999/5756 LAT/SP 04/15 Issue 1 (T2/T3)

