



## Material Lifts

Genie® Lift™

### Specifications

Models	GL™-8		GL™-10		GL™-12	
Measurements	Metric	US	Metric	US	Metric	US
<b>A</b> Height - stowed <sup>1,2,3</sup>	1.72 m	5 ft 7.5 in	2.00 m	6 ft 6.5 in	2.31 m	7 ft 7 in
maximum forks down	2.51 m	8 ft 3 in	3.01 m	9 ft 10.5 in	3.66 m	12 ft
maximum forks up	3.06 m	10 ft 0.5 in	3.56 m	11 ft 8 in	4.20 m	13 ft 9.5 in
minimum forks down	0.09 m	3.5 in	0.05 m	2 in	0.05 m	2 in
<b>STANDARD BASE</b>						
<b>B</b> Length - stowed	0.30 m	1 ft	-	-	-	-
operating	0.88 m	2 ft 10.75 in	-	-	-	-
<b>C</b> Width: outside	0.63 m	2 ft 0.75 in	-	-	-	-
Weight - standard caster options	60 kg	132 lbs	-	-	-	-
pneumatic caster options	62 kg	136 lbs	-	-	-	-
<b>STRADDLE BASE</b>						
Length - stowed	0.49 m	1 ft 7.25 in	0.49 m	1 ft 7.25 in	0.49 m	1 ft 7.25 in
operating	1.09 m	3 ft 7 in	1.09 m	3 ft 7 in	1.09 m	3 ft 7 in
Width - stowed <sup>4</sup>	0.73 m	2 ft 4.75 in	0.73 m	2 ft 4.75 in	0.73 m	2 ft 4.75 in
maximum <sup>4</sup>	1.10 m	3 ft 7.5 in	1.10 m	3 ft 7.5 in	1.10 m	3 ft 7.5 in
maximum inside	0.91 m	3 ft	0.91 m	3 ft	0.91 m	3 ft
Weight - standard caster options	66 kg	145 lbs	68 kg	149 lbs	70 kg	154 lbs
pneumatic caster options	68 kg	149 lbs	69 kg	153 lbs	72 kg	158 lbs
4-point caster option	72 kg	158 lbs	73 kg	162 lbs	76 kg	167 lbs
<b>COUNTERWEIGHT BASE</b>						
Length - operating	0.72 m	2 ft 4.5 in	0.72 m	2 ft 4.5 in	-	-
Width - stowed <sup>4</sup>	0.73 m	2 ft 4.75 in	0.73 m	2 ft 4.75 in	-	-
maximum <sup>4</sup>	1.10 m	3 ft 7.5 in	1.10 m	3 ft 7.5 in	-	-
maximum inside	0.91 m	3 ft	0.91 m	3 ft	-	-
Weight - standard caster options	186 kg	411 lbs	196 kg	433 lbs	-	-


### Productivity

Load height minimum	0.09 m	3.5 in	0.09 m	3.5 in	0.09 m	3.5 in
Ground clearance - centre <sup>1, 2, 3</sup>	0.02 m	0.75 in	0.02 m	0.75 in	0.02 m	0.75 in
Average cranks - standard winch	38/m	11.5/ft	38/m	11.5/ft	38/m	11.5/ft
Fork length	0.57 m	1 ft 10.5 in	0.57 m	1 ft 10.5 in	0.57 m	1 ft 10.5 in
Fork width	0.52 m	1 ft 8.5 in	0.52 m	1 ft 8.5 in	0.52 m	1 ft 8.5 in
Load platform length	0.58 m	1 ft 11 in	0.58 m	1 ft 11 in	0.58 m	1 ft 11 in
Load platform width	0.56 m	1 ft 10 in	0.56 m	1 ft 10 in	0.56 m	1 ft 10 in
Load capacity at 12 in (30 cm) load centre	181 kg	400 lbs	159 kg	350 lbs	159 kg	350 lbs
Boom length	0.51 m	20.19 in	0.51 m	20.19 in	0.51 m	20.19 in
Boom attachment points	34 / 48 cm	13.25 / 19 in	34 / 48 cm	13.25 / 19 in	34 / 48 cm	13.25 / 19 in

### Power

Power source

reversible standard winch

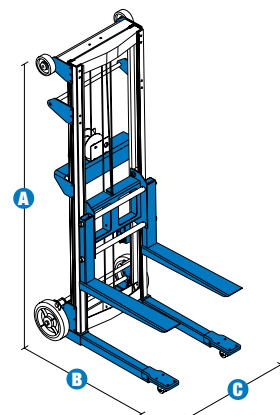

<sup>1</sup> The 10 in pneumatic rear wheel option will add 2.5 cm (1 in) to these specifications.

<sup>2</sup> The counterweight base will add 2.5 cm (1 in) to these specifications.

<sup>3</sup> The 4-point caster option B will add 2.5 cm (1 in) to these specifications.

<sup>4</sup> Outside dimensions.

[www.genielift.com.au](http://www.genielift.com.au)



## Material Lifts

Genie® Lift™

### Features

#### Standard Features

##### Measurements

###### GL™-8

- 3.06 m (10 ft 0.5 in) maximum lift height
- Up to 181 kg (400 lbs) load capacity

###### GL™-10

- 3.56 m (11 ft 8 in) maximum lift height
- Up to 159 kg (350 lbs) load capacity

###### GL™-12

- 4.20 m (13 ft 9.5 in) maximum lift height
- Up to 159 kg (350 lbs) load capacity

##### Productivity

- Standard forks
- Portable and compact design
- Lightweight durable aluminum construction
- Single door access
- Durable standard steel forks
- 20 cm (8 in) non-marking rear wheels and 5 cm (2 in) dual wheel front swivel casters (standard and straddle base only)
- 12 cm (5 in) rear swivel casters with side brakes and 10 cm (4 in) fixed front wheels (counterweight base only)
- Loads easily into a ute for transporting
- Hold-down mechanism secures carriage during transport

##### Power

- Standard winch
- Reversible winch handle for easy storage

#### Options & Accessories

##### Productivity

- Counterweight base (GL™-8, -10)
- Load platform
- Boom
- Aluminum ladder (standard and straddle base only)
- Pneumatic rear tyres (standard and straddle base only)
- Foot-release brake (standard and straddle base only)
- Caster options
- Straddle base

##### Options

- Caster option kit required for use with Straddle bases



Genie Australia – Toll free number 1800 788 633

#### Brisbane

HEAD OFFICE

33 Kimberley Street  
Darra QLD 4076

#### Sydney

74 Glendenning Road  
Glendenning NSW 2761

#### Melbourne

374 Hammond Road  
Dandenong VIC 3175

#### Adelaide

16-18 Nixon Road  
Wingfield SA 5013

#### Perth

126 Sheffield Road  
Welshpool WA 6106

Genie United States Distributed By:

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington  
98073-9730

Effective Date: September, 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2013 Terex Corporation.

GL-4, G-8, G-10, G-12 140912

[www.genielift.com.au](http://www.genielift.com.au)