


OMME4200

OMME SPIDER LIFTS

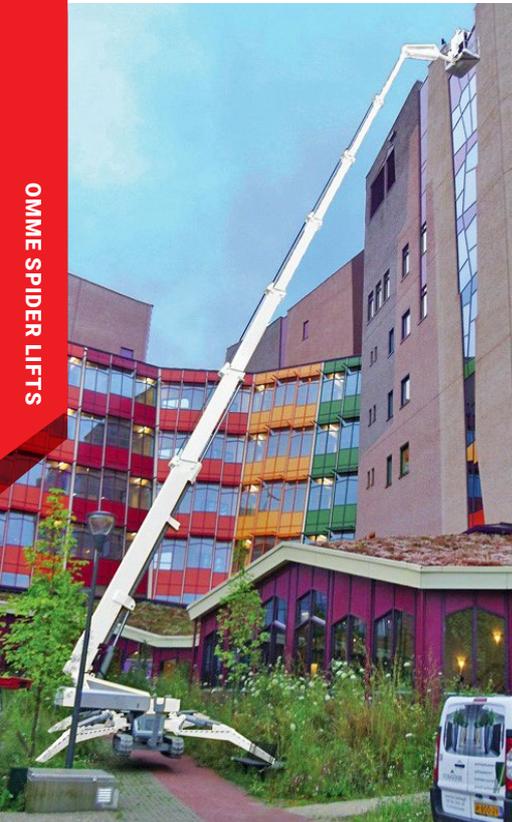

The top of the range Omme 4200 has a huge 42 m working height and a horizontal outreach of 15 m providing an enormous working envelope. And with a weight of only 6.9 t, this Spider Lift is ideal for operating in tight access locations or on load sensitive flooring. The strong all-steel boom sections provide a stable and comfortable platform even at 42 m off the ground!

With stowed dimensions of only 8.3 m long with the basket removed, and 1.35 m wide with the tracks retracted, the 4200 is an amazingly compact machine.

The strong steel booms provide a stable ride even at such tall heights, and coupled with the high-quality design and componentry used in this magnificent machine ensures a very long and reliable working life.

Even though this is such a tall machine, the operations are very simple. The Omme controls and functions are virtually identical across the whole range. As with all Omme Lifts, radio control drive and auto level are standard features.

Far left: The 4200 is the perfect choice for reaching the tallest heights from fragile areas such as these gardens.




Above middle: Can you believe this? A 130' boom-lift coming in through a doorway!

Above right: Long but strong! Omme are one of the oldest manufacturers of tall Spider Lifts, and their experience in boom designs is very apparent and greatly valued at these altitudes.

OMME4200

Max working height	42.00 m
Max working height in narrow set	36.5m / 80 kg (33.25 / 230 kg)
Max horizontal outreach	15.2 m
Max SWL	230 kg
Weight: Expandable tracks	6900 kg
Turret rotation	710 °
Basket rotation	100 °
Ground pressure driving (approx)	97 kN/m ²
Max stabiliser force	43 kN
Max stabiliser pressure (std foot pad)	350 kN/m ²
Traffic load (live load) travelling	5.7 kN/m ²
Traffic load (live load) stabilised wide	3.6 kN/m ²
Traffic load (live load) stabilised narrow	3.9 kN/m ²
Auto levelling	Std
Max slope for stabilisers (no extra pads)	15 °
Gradeability lengthwise	16.7 °
Gradeability sideways	15 °
Standard power source	Kubota 20 Hp Diesel
Optional power source	N/A
Dual power options	Batteries
Expanding tracks	Std
Drive Speed	2.5 km/h
Radio control	Std
Electric emergency lowering	Std

(All specs E&OE and subject to change)

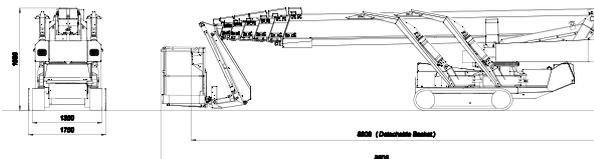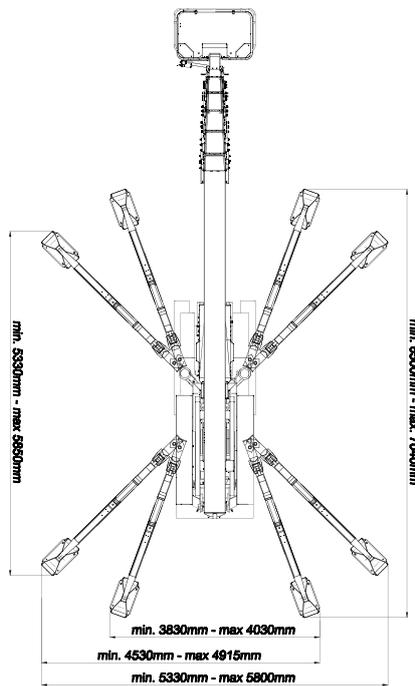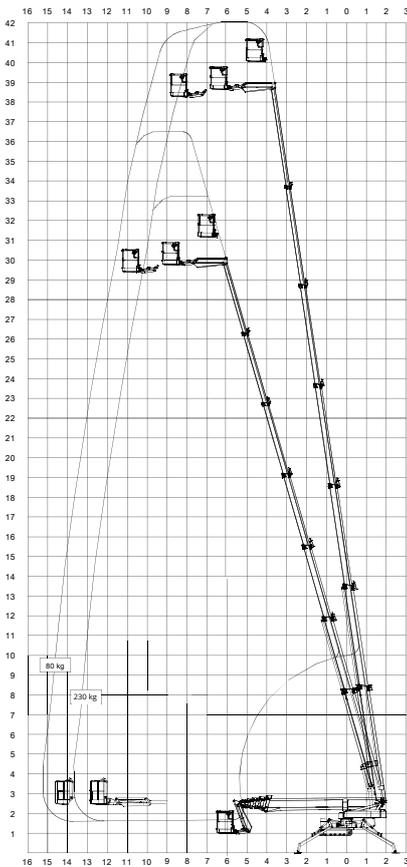

SEE THE 4200
IN ACTION

