

SELF-PROPELLED SCISSOR LIFTS

GS™-3384 RT



Specifications

MODEL	GS™-3384 RT	
MEASUREMENTS	Metric	US
Working height maximum*	12.06 m	39 ft
A Platform height maximum	10.06 m	33 ft
B Platform height - stowed**	1.55 m	5 ft 1 in
C Platform length:	3.98 m	13 ft 0.5 in
outside, extended - single deck	5.34 m	17 ft 6.25 in
outside, extended - dual deck	6.57 m	21 ft 6.5 in
D Slide-out platform extension deck - front	1.52 m	5 ft
E Slide-out platform extension deck - rear	1.22 m	4 ft
F Platform width - outside	1.83 m	6 ft
G Height - stowed: - folding guardrails	2.68 m	8 ft 9.5 in
- rails lowered	2.00 m	6 ft 6.75 in
H Length - stowed with outriggers	4.88 m	16 ft
I Width: - standard tyres	2.13 m	7 ft
- high flotation tyres	2.41 m	7 ft 11 in
J Wheelbase	2.84 m	9 ft 4 in
K Ground clearance - centre	0.33 m	13 in


PRODUCTIVITY		
Maximum platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
Lift capacity - extension deck	227 kg	500 lbs
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger leveling: - front to back	7°	7°
- side to side	12°	12°
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45 / 29 sec	45 / 29 sec
Controls	proportional	
Drive	four wheel	
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

POWER		
Power source	Deutz D2011L03i 3 cylinder diesel 36 kW (49 hp) air cooled	
Auxiliary Power unit	12V DC	
Fuel tank capacity	113.6L	30 gal
Hydraulic system capacity	113.6L	30 gal

WEIGHT****		
with outriggers	6,743 kg	14,866 lbs

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 2 in (5.8 cm) for turf and non-marking.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

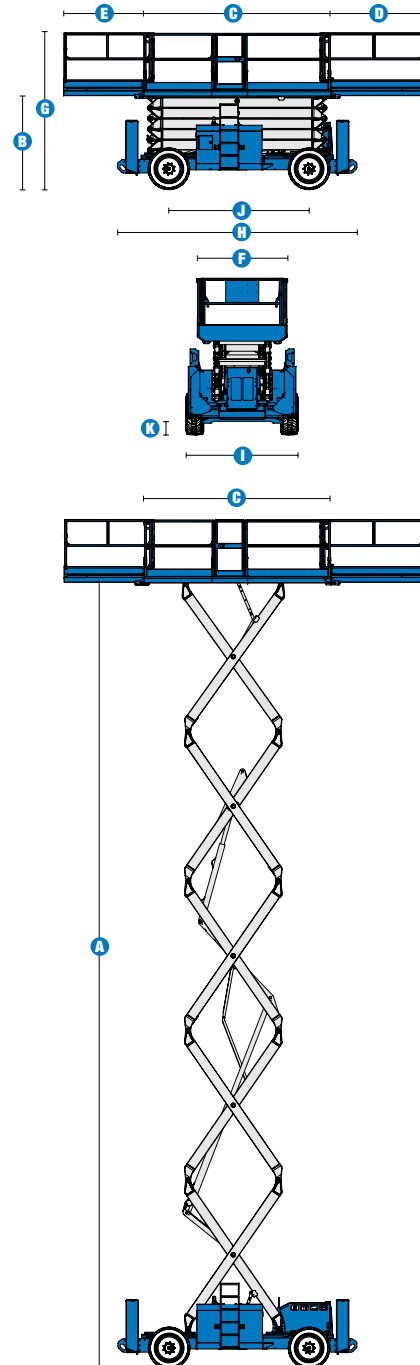

SELF-PROPELLED SCISSOR LIFTS

GS™-3384 RT



Features

STANDARD FEATURES

MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lbs) lift capacity

PRODUCTIVITY

- 3.98 m x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform with replaceable diamond plate deck
- Dual slide-out platform extension decks 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Automatic leveling hydraulic outriggers
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing full height swing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Hydraulic oil cooler
- Foam-filled rough terrain tyres
- Tilt alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Motion alarm

POWER

- Deutz diesel 36 kW (49 hp)


OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Non-marking rough terrain tyres 25 x 79 cm (10 x 31 in)
- High flotation foam-filled tyres 41 x 84 cm (16 x 33 in)
- Platform work lights

POWER OPTIONS

- 7 kVA Hydraulic generator (240 V/50 Hz)
- Cold weather package
- Arctic package
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- 240 V power to platform

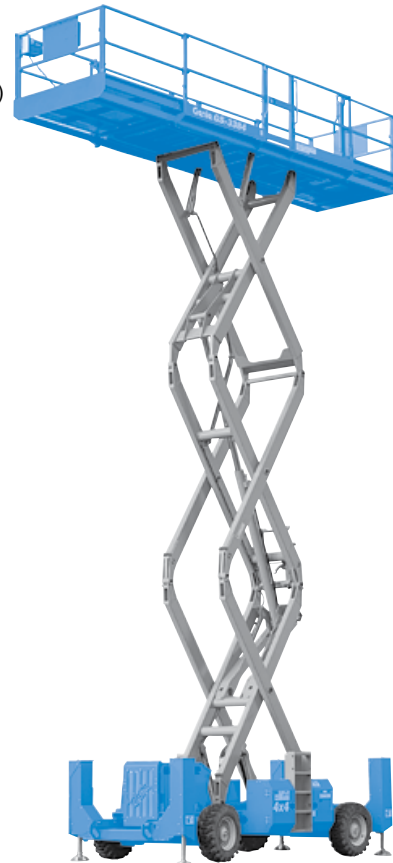

Genie Australia – Toll free number 1800 788 633

Brisbane (Head Office)
33 Kimberley Street
Darra QLD 4076

Sydney
74 Glendenning Road
Glendenning NSW 2761

Melbourne
374 Hammond Road
Dandenong VIC 3175

Perth
126 Sheffield Road
Welshpool WA 6106

Genie United States Distributed by:

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington
98073-9730

Effective Date: April 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operators' Manual for instructions on the proper use of this equipment. Failure to follow the Operators Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation, Terex South Dakota, Inc., and/or their subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. in the USA and many other countries. ©2009 Terex Corporation.

www.genieindustries.com.au

GS-3384RT 090327 Ver1