

DINGLI S06-HAE

Exceed · New Height

JCPT0807HA

Self-propelled Scissor Lifts

SPECIFICATIONS


Size	Metric	British
Max. Working Height A	7.80m	25ft 7in
Max. Platform Height B	5.80m	19ft
Overall Length C	1.86m	6ft 1in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	2.15m	7ft 1in
Overall Height(Rails Down) F	1.83m	6ft
Platform Size(Length×Width)	1.67m×0.74m	5ft 5.7in×2ft 5in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	3.5in/1in
Wheelbase H	1.36m	4ft 5.5in
Turning Radius(Inside/Outside)	0m/1.64m	0in/5ft 5in
Tyres	Φ323×100mm	Φ323×100mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants	2	2
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	4.0km/h
Travel Speed(Raised)	0.6km/h	0.6km/h
Max. Working Slope	1.5°/3°	1.5°/3°
Up/Down Speed	21/25sec	21/25sec

Weight		
Overall Weight(Lead-acid Battery)	1610kg	3549lb
Overall Weight(Lithium Battery)	1560kg	3439lb

Power		
Hydraulic Tank	6.5L	6.5L
Battery	4×6V/185Ah	4×6V/185Ah
Charger	24V/30A	24V/30A
Lifting Motor	24VAC/3kW	24VAC/3kW

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

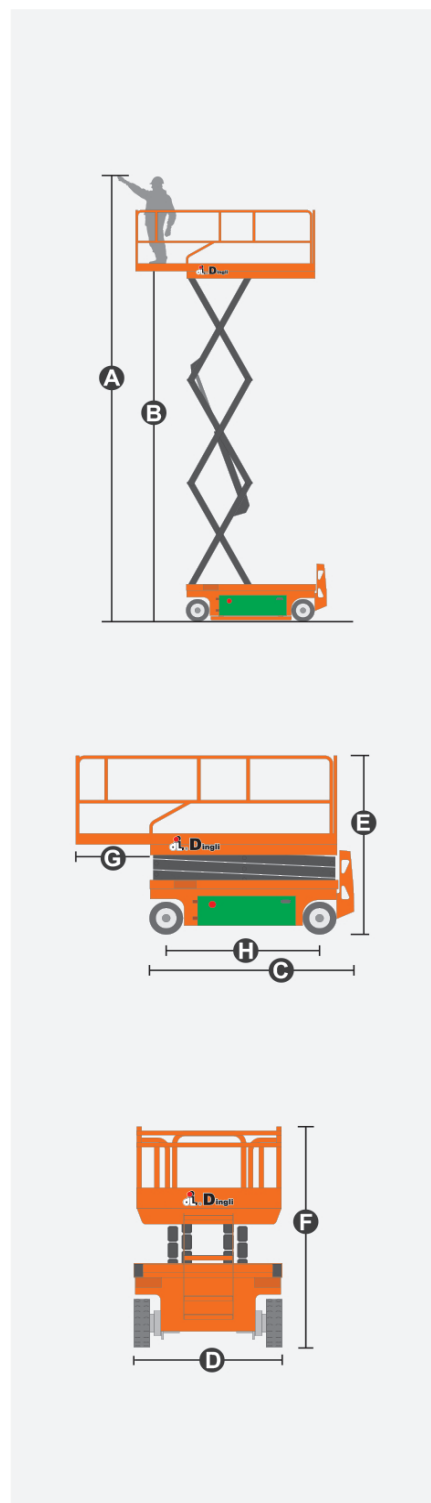

DINGLI S06-HAE

Exceed · New Height

JCPT0807HA

Self-propelled Scissor Lifts

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tires
- 4×2 Drive
- Platform Load Sense System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points

Optional Items

Factory Battery

- Lead-Acid Battery **
- Lithium Battery

Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Ultrasonic Sensor on Platform

** Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road,Deqing,Zhejiang P.R.China 313219

Telephone +86(572)8681688

Fax +86(572)8681960

E-Mail export@cndingli.com

[Http://www.cndingli.com](http://www.cndingli.com)



Due To Continuous Technology Updates, Technical Parameters Are Subject To Change Without Notice.
This Picture Book Is For Reference Only, The Actual Product Shall Prevail. The Copyright Is Owned By
Zhejiang Dingli, Any Content May Not Be Copied Or Copied For Any Purpose Without Written Permission.
2022-01