

## DINGLI SL2023-AWD

Exceed. New Height

## JCPT2223RTB

Self-propelled Scissor Lifts

### SPECIFICATIONS

Size	Metric	British
Max. Working Height <b>A</b>	22.00m	72ft 2in
Max. Platform Height <b>B</b>	20.00m	65ft 7in
Overall Length <b>C</b>	4.95m	16ft 3in
Overall Width <b>D</b>	2.46m	8ft 1in
Overall Height(Rails Up) <b>E</b>	3.86m	12ft 8in
Overall Height(Rails Down) <b>F</b>	3.00m	9ft 10in
Platform Size(Length×Width)	4.59m×2.25m	15ft 1in × 7ft 5in
Platform Extension Size <b>G</b>	2.70m	8ft 10in
Ground Clearance(Stowed/Raised)	0.40m	1ft 4in
Wheelbase <b>H</b>	3.30m	10ft 10in
Turning Radius(Inside/Outside)	1.25m/3.40m	4ft 1in/11ft 2in
Tyres	36×14-20	36×14-20

### Performance

S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants	4	4
Gradeability	40%	40%
Travel Speed(Stowed)	4.7km/h	4.7km/h
Travel Speed(Raised)	0.4km/h	0.4km/h
Max. Working Slope	2°/3°	2°/3°
Up/Down Speed	75/75sec	75/75sec


### Weight

Overall Weight	13000kg	28660lb
----------------	---------	---------

### Power

Diesel Engine	36.4kW/2600rpm	36.4kW/2600rpm
Diesel Tank	100L	100L
Hydraulic Tank	150L	150L

\* The platform height plus 2m (7ft in British standard) is the working height.  
Standards Compliance

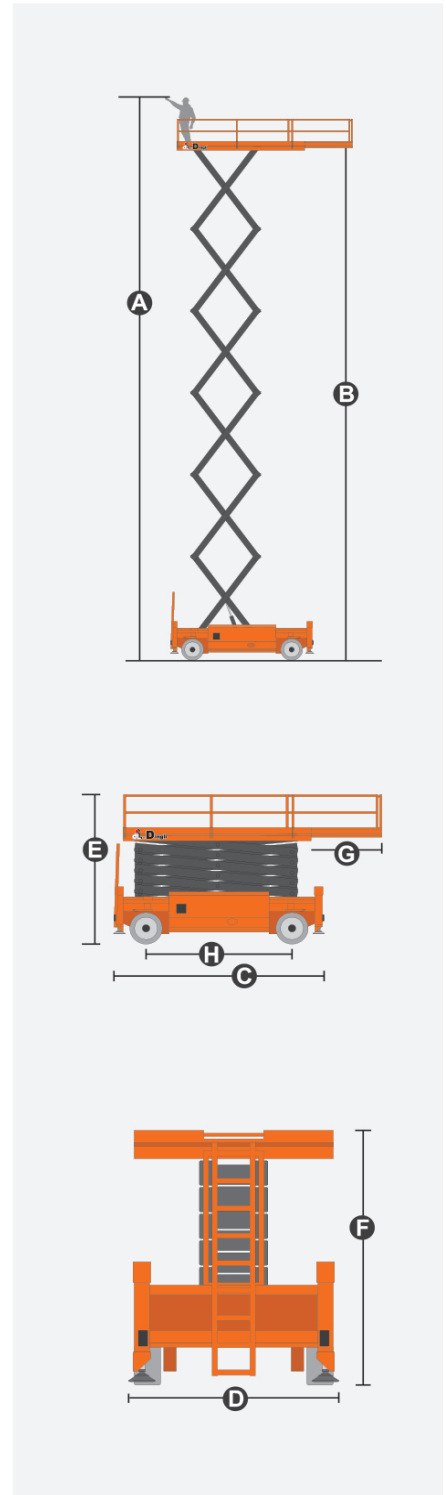

## DINGLI SL2023-AWD

Exceed · New Height

## JCPT2223RTB

Self-propelled Scissor Lifts

### FEATURES

#### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Charging Indicator
- 4×4 Drive
- 4×4 Steer
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

#### Optional Items

- Factory Tyres**
  - Solid Rubber Tyres \*\*
  - Non-Marking Tyres
- Factory Hydraulic Oil**
  - No. 46 Hydraulic Oil (Mineral Oil)\*\*

#### Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Visual Spirit Level
- Hydraulic Generator
- Oil-Water Separator
- Outrigger Pad Package
- Guard Mesh Package
- Self-Lubrication System

\*\* Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

#### ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road,Deqing,Zhejiang P.R.China 313219  
Telephone +86(572)8681688  
Fax +86(572)8681960  
E-Mail [export@cndingli.com](mailto:export@cndingli.com)  
[Http://www.cndingli.com](http://www.cndingli.com)



Due To Continuous Technology Updates, Technical Parameters Are Subject To Change Without Notice.  
This Picture Book Is For Reference Only, The Actual Product Shall Prevail. The Copyright Is Owned By  
Zhejiang Dingli, Any Content May Not Be Copied Or Copied For Any Purpose Without Written Permission.  
2022-01